

DISTRICT COURT, WATER DIVISION 1, COLORADO DATE FILED: January 25, 2019 6:38 AM
CASE NUMBER: 2016CW3119

9th Avenue & 9th Street
P. O. Box 2038
Greeley, CO 80631

CONCERNING THE APPLICATION FOR WATER
RIGHTS OF:

CENTRAL COLORADO WATER CONSERVANCY
DISTRICT

IN BOULDER and WELD COUNTIES.

▲COURT USE ONLY ▲

Case No.: 16CW3119
Courtroom 1: Div. 1

**FINDINGS OF FACT, CONCLUSIONS OF LAW AND
DECREE OF THE WATER COURT**

FINDINGS OF FACT

1. Name and Address of Applicant: Central Colorado Water Conservancy District, 3209 West 28th Street, Greeley, CO 80634. (Referred to herein as either "Applicant" or "Central".)
2. All notices of this matter required by law have been fulfilled and the Court has jurisdiction over the subject matter of this application and over all persons and property affected by it, irrespective of whether they or its owners have appeared.
3. Statements of opposition were filed by L.G. Everist, Inc., Centennial Water and Sanitation District, Dream Weaver Holdings, LLC, Water Users Association of District No. 6, Rural Ditch Company, Martin Marietta Materials, Inc., City of Boulder, City of Greeley, Public Service Company of Colorado, United Water and Sanitation District, City and County of Denver acting by and through its Board of Water Commissioners, Varra Companies, Inc., City of Englewood, Farmers Reservoir and Irrigation Company, and the State Engineer and Division Engineer, Water Division No. 1. No other statements of opposition were filed and

the time for filing has expired. Stipulations or settlements were entered into between Applicants and the objectors as follows:

- 3.1. Martin Marietta Materials, Inc., November 13, 2018.
- 3.2. City and County of Denver acting by and through its Board of Water Commissioners, November 15, 2018.
- 3.3. L.G. Evert, Inc., November 28, 2018.
- 3.4. Farmers Reservoir and Irrigation Company, December 12, 2018.
- 3.5. Varra Companies, Inc., December 14, 2018.
- 3.6. City of Englewood, December 14, 2018.
- 3.7. Water Users Association of District No. 6, December 14, 2018.
- 3.8. City of Greeley, December 17, 2018.
- 3.9. Public Service Company of Colorado, December 18, 2018.
- 3.10. United Water and Sanitation District, December 20, 2018.
- 3.11. Dream Weaver Holdings, LLC, January 11, 2019.
- 3.12. State Engineer and Division Engineer, Water Division No. 1, January 14, 2019.
- 3.13. City of Boulder, January 15, 2019.
- 3.14. Rural Ditch Company, January 15, 2019.
- 3.15. Centennial Water and Sanitation District, January 21, 2019.

CHANGE OF WATER RIGHTS – RURAL DITCH CO. SHARES

4. Water Rights to be Changed. 7.04 of the outstanding 50 shares in the Rural Ditch Company represented by stock certificate No. 410 (“7.04 Shares”).
5. Previous Decrees for the Water Rights.
 - 5.1. The Rural Ditch was decreed in Case № 1336 on June 2, 1882, with an appropriation date of May 10, 1862, for 22.75 c.f.s. and an appropriation date of March 10, 1863, for 175.54 c.f.s. from Boulder Creek. 115.29 c.f.s. of the 175.54 c.f.s. 1863 water right was abandoned by decree in Case № 84CW412. The decreed use is for irrigation. The headgate location is on Boulder Creek in the NE $\frac{1}{4}$ of Section 20, Township 2 North, Range 68 West of the 6th P.M., Weld County, Colorado. Expressed as a flow rate the 7.04 Shares equate to 3.20 c.f.s. of the 1862 right and 8.48 c.f.s. of the 1863 Right. Except as described in paragraph 9.1.8, these flow rates are set forth herein solely for the purposes of recording the change of water rights in the water rights tabulation and are not intended to serve as a term or condition governing the delivery or use of the 7.04 Shares.

6. Historical Use.

- 6.1. Acreage and Water Deliveries. The 7.04 Shares were historically used along with other shares in the Rural Ditch Company to irrigate an average of approximately 360 acres located in Section 10, Township 2 North, Range 68 West, 6th P.M. Weld County, Colorado, as shown on **Figure 1** attached hereto, with an average of 252 acres irrigated using the 7.04 Shares over a study period of 1950 – 1996. The study period includes wet, dry, and average years, and is representative of the historical use of the 7.04 Shares. Pro rata river headgate diversions for the 7.04 Shares averaged 755.8 acre-feet per year. Applicant estimated ditch loss to be 10%, which is consistent with previous decreed changes of Rural Ditch shares. After adjusting for ditch loss, the farm headgate deliveries for the 7.04 Shares were an average of 680.2 acre-feet per year.
- 6.2. Historical Consumptive Use. The historical consumptive use was estimated using the modified Blaney-Criddle method adjusted to approximate results consistent with the ASCE Standardized Reference Evapotranspiration Methodology. The analysis reflected effective precipitation and soil moisture storage and carryover. Based on maximum application irrigation efficiencies of 40-60%, the average annual consumptive use amount for the 7.04 Rural Shares was 383.6 acre-feet (54.5 acre-feet per share).
- 6.3. Historical Return Flows. Total historical return flows for the 7.04 Shares were determined to be 296.6 acre-feet per year on average. A portion of the return flows from the irrigated lands accrued to Idaho Creek, and a portion accrued to Godding Hollow. In accordance with the terms of the stipulations dated May 13, 2005 between the Ground Water Management Subdistrict of the Central Colorado Water Conservancy District and the City of Greeley, and a separate stipulation with the City of Englewood, in Case No. 02CW335, 100 percent of the return flows were assumed to return to the river as subsurface return flows for lands located more than ½ mile from the stream where return flows accrued (this included the portion of the lands where return flows accrued to Godding Hollow), and for lands located less than ½ mile from the stream where return flows accrued 60 percent of the return flows were assumed to return to the river as subsurface return flows with the balance of 40 percent returning to the river as surface return flows in the same month (this includes the portion of the lands where return flows accrued to Idaho Creek).
7. Change of Water Right. Applicant seeks to change the use of the water rights represented by the 7.04 Shares to augmentation, recharge, replacement, industrial, exchange, and irrigation use on the Rinn Valley Parcel, with the right to totally consume the consumable portion of the water, either by first use, successive use, or disposition. The 7.04 Shares may be used as a source of augmentation and replacement supply in the plans for augmentation in Case No. 02CW335 (Ground Water Management Subdistrict of the Central Colorado Water Conservancy District (“GMS”)) and Case No. 03CW99 (Well Augmentation Subdistrict of the Central Colorado Water Conservancy District (“WAS”)), and such other decreed augmentation plans as Applicant, GMS, or WAS shall obtain in the future and which identify

the 7.04 Shares as a source, for replacing well depletions and return flows. The 7.04 Shares may be leased to others for use within the boundaries of Central and its subdistricts as they exist now and in the future in a manner consistent with this Decree, and in accordance with the terms and conditions of such other decree(s) or approved substitute water supply plans as are applicable to lessees.

8. Operation. The 7.04 Shares will continue to be diverted at the river headgate of the Rural Ditch. From that point the 7.04 Shares may be delivered to any of the following structures generally shown on **Figure 1**: 1) the Shores Pond B Inlet Structure, located at a point in the SE $\frac{1}{4}$ of the NE $\frac{1}{4}$ of Section 2, Township 2 North, Range 68 West of the 6th P.M. in Weld County, Colorado (Shores Reservoir is owned by GMS and WAS and is described in the decree entered in Case No. 00CW83, Water Division No. 1); 2) an augmentation structure currently located near the downstream end of the Rural Ditch at a point in the NW $\frac{1}{4}$ NW $\frac{1}{4}$ NE $\frac{1}{4}$ of Section 1, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado; 3) a future augmentation/bypass structure to be constructed by the Rural Ditch Company at a location at or near its river headgate on Boulder Creek; 4) a future augmentation structure known as the Tri Town Stormwater Augmentation Station which will provide drainage to St. Vrain Creek at a location to be determined near the downstream end of the Rural Ditch; 5) a planned, to-be-constructed Shores Pond C Inlet Structure located in the S $\frac{1}{2}$ of the NW $\frac{1}{4}$ of Section 1, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado; 6) three existing storage reservoirs, two existing inlet structures and two planned, to-be-constructed inlet structures into storage reservoirs located on the Rinn Valley Parcel, which is located in Section 10, Township 2 North, Range 68 West, 6th P.M.; 7) Hokestra Pit and Augmentation Station, at an existing Rural Ditch headgate located in the NE $\frac{1}{4}$ SW $\frac{1}{4}$ of Section 2, Township 2 North, Range 68 West of the 6th P.M., in Weld County, Colorado; and 8) Heaton Pit, owned by Martin Marietta Materials, located in the NE $\frac{1}{4}$ of Section 9, Township 2 North, Range 68 West of the 6th P.M., Weld County. The 7.04 Shares may be stored in any of the storage reservoirs described herein and may be subsequently delivered to Boulder Creek, Idaho Creek, or St. Vrain Creek from the reservoirs. Prior to use of the augmentation structures described in items 3), 4) and 5), Applicant will obtain verbal approval by the water commissioner confirming that each augmentation station will deliver water in the locations consistent with **Figure 1**. Following such verbal approval, the Office of the Division Engineer for Water Division No. 1 shall send to Applicant and e-file a written confirmation of the approval.
9. Terms and Conditions for Deliveries and Use of the 7.04 Shares. The court finds the following terms and conditions are sufficient to prevent injury to water rights of others.

9.1. Delivery Limitations.

- 9.1.1. Deliveries. All diversions of the 7.04 Shares shall be made through the river headgate of the Rural Ditch and delivered to any of the reservoirs or augmentation stations described in paragraph 8 above, after deductions for ditch loss as described below. All deliveries shall be measured. Augmentation

station(s) may be relocated or other augmentation stations may be added as determined by agreement with the Rural Ditch Company and by filing an application with the Water Court; and obtaining a subsequent approval pursuant to a temporary Substitute Water Supply Plan approved by the State Engineer pursuant to sections 37-92-308 or a Water Court decree; however no subsequent Water Court application nor Substitute Water Supply Plan shall be required prior to use of the augmentation stations described in paragraph 8 above. The amount measured at the individual measurement point at a reservoir or augmentation station shall be the "Augmentation Delivery" for the purposes of this Decree (and is equivalent to the historical Farm Headgate Delivery) and shall include both the consumptive use portion and the return flow portion of the 7.04 Shares.

- 9.1.2. Ditch Loss. Central shall bear actual ditch losses for water delivered under the 7.04 Shares in the same percentage as all other shareholders in the Rural Ditch Company and in accordance with Rural Ditch Company bylaws and policies.
- 9.1.3. Seasonal Limitation. Central's deliveries of the 7.04 Shares will be limited to the period of April 1 through October 31.
- 9.1.4. Monthly Volumetric Augmentation Delivery Limitations. Augmentation Deliveries of the 7.04 Shares shall be limited to the following monthly acre-foot maximums.

Apr	May	Jun	Jul	Aug	Sep	Oct
60	210	306	353	310	133	103

- 9.1.5. Annual Volumetric Augmentation Delivery Limitation. Annual Augmentation Deliveries of the 7.04 Shares shall not exceed 1,054.3 acre-feet, or 149.8 acre-feet per share, in any year.
- 9.1.6. Monthly Twenty-Year Volumetric Augmentation Delivery Limitation. Augmentation Deliveries of the 7.04 Shares shall not exceed the following monthly acre-foot maximums as rolling 20-year cumulative limits. In order to maintain a proper accounting of this rolling volumetric limit and to determine the currently allowed Augmentation Delivery, the following method shall be used: (1) sum the previous nineteen years of measured deliveries of the 7.04 Shares for each month; and (2) subtract the sum from the respective rolling 20-year cumulative volumetric limit for each month. For the purpose of starting the calculation for the 20-year rolling cumulative volumetric limitation, for the 19 years prior to the first year in which the 7.04 Shares are used pursuant to this Decree, Applicant shall assume that deliveries were the acre-foot amounts shown below.

	Apr	May	Jun	Jul	Aug	Sep	Oct
Limit	60	1,743	2,946	4,489	2,980	1,136	252
Start	0	81	139	218	141	53	8

- 9.1.7. Twenty-Year Volumetric Augmentation Delivery Limitation. Augmentation Deliveries of the 7.04 Shares shall not exceed 13,605 acre-feet as a rolling 20-year cumulative limit. In order to maintain a proper accounting of this rolling volumetric limit and to determine the currently allowed Augmentation Delivery, the following method shall be used: (1) sum the previous nineteen years of measured deliveries of the 7.04 Shares; and (2) subtract the sum from the respective rolling 20-year cumulative volumetric limit. For the purpose of starting the calculation for the 20-year rolling cumulative volumetric limitation, for the 19 years prior to the first year in which the 7.04 Shares are used pursuant to this Decree, Applicant shall assume that deliveries were 661 acre-feet per year.
- 9.1.8. Applicant Obligation when Volume Limits are Reached. During any time in which the Applicant is precluded from taking delivery of water attributable to the 7.04 Shares under the terms of this Decree as a result of operation of the monthly, annual, or long-term volumetric limits set forth in paragraphs 9.1.4 – 9.1.7 of this decree, Applicant's pro rata portions of the Rural Ditch water rights set forth in paragraph 5.1 (3.20 cfs of the 1862 right and 8.48 cfs of the 1863 right) shall not be called for or diverted at the Rural Ditch headgate located on Boulder Creek, which location is described in Section 5.1 of this decree. Diversions at the Rural Ditch headgate on Boulder Creek during such times shall not exceed 19.55 cfs under the 1862 right and 51.77 cfs under the 1863 right. For purposes of administering this paragraph, Applicant shall promptly notify the Rural Ditch Company and the Water Commissioner when it reaches any of the volumetric limits in this decree. Upon notification, the Rural Ditch Company shall also promptly notify the Water Commissioner that Applicant has reached a volume limit described in paragraphs 9.1.4-9.1.7 of this decree.

9.1.8.1. Applicant, the State Engineer and Division Engineer, Water Division No. 1 (Engineers), the City of Boulder (Boulder), and the Rural Ditch Company (Rural) do not agree on whether the term and condition in 9.1.8 is necessary to prevent injury to the owners of vested water rights or decreed conditional water rights, and such issue was not litigated in this case. The term in 9.1.8 is included in this decree as a compromise resulting from comprehensive settlement negotiations between Applicant, Engineers, Boulder, and Rural. Applicant, Engineers, Boulder, and Rural agree that including the term in 9.1.8 shall have no precedential effect in other pending or future cases, and such

parties agree that they each reserve the right to challenge or support a term similar to 9.1.8 in other pending or future cases.

9.1.9. **Transit Loss.** When Augmentation Deliveries are made to an augmentation station, reasonable transit loss shall be assessed by the Division Engineer's Office from the measurement point to the location where Augmentation Deliveries discharge into Boulder Creek or St. Vrain Creek in calculating the augmentation credit at Boulder Creek or St. Vrain Creek. If a lined ditch is used or if deliveries are made through a pipe, no transit loss shall be assessed provided the structures are properly maintained and in good repair, unless the Division Engineer or Water Commissioner finds that transit loss actually occurs.

9.2. **Return Flow Obligations.** Diversions of the 7.04 Shares will incur return flow obligations to Idaho Creek and Godding Hollow. The return flow obligations will be determined as follows:

9.2.1. **Calculation of Daily Obligations.** The timing and volume of return flow obligations from the 7.04 Shares will be determined daily as follows:

Idaho Creek: For the months of April through October, daily surface water return flow obligations shall be determined by multiplying the surface water Idaho Creek return flow factor in the table below for the appropriate month by the daily Augmentation Deliveries of the 7.04 Shares. For the months of January through December, the monthly deep percolation return flow obligations shall be determined by multiplying the Idaho Creek deep percolation return flow factor in the table below for the appropriate month to the total Augmentation Deliveries of the 7.04 shares during the preceding April through October. Daily return flow obligations shall be determined by dividing the monthly return flow obligation by the number of days in that month.

Godding Hollow: The monthly return flow obligations shall be determined by multiplying the Godding Hollow return flow factor in the table below for the appropriate month to the total Augmentation Deliveries of the 7.04 shares during the preceding April through October. Daily return flow obligations shall be determined by dividing the monthly return flow obligation by the number of days in that month.

		Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Idaho Creek	Surface				7.5%	7.6%	8.0%	8.3%	7.9%	8.2%	7.6%		
	Deep Percolation	0.1%	0.0%	0.0%	0.1%	0.9%	1.9%	3.2%	2.9%	1.7%	0.8%	0.3%	0.1%
Godding Hollow		2.2%	2.0%	1.8%	1.6%	1.5%	1.5%	1.6%	1.9%	2.3%	2.5%	2.5%	2.3%

- 9.2.2. Replacement of Return Flows. Applicant shall deliver water to satisfy its return flow obligations under this Decree on a daily basis at times when there is a valid call for water from a location downstream of the points where such return flows historically accrued to Idaho Creek and Godding Hollow as described in ¶¶ 9.2.2.1 and 9.2.2.2 below and as described in ¶9.2.1 above, and such call is senior to September 28, 2016. Valid senior calls for water are limited to calls from senior water rights, including decreed exchanges, adjudicated and operating under Colorado law. For purposes of this matter only and not to be construed as precedent in subsequent matters, the term "call" as used in this Decree means a demand, recorded or unrecorded, by a senior priority for the curtailment of diversions by junior, upstream priorities in order that water be made available to the calling senior to satisfy the need for water of its senior priorities. Applicant shall replace return flow obligations upstream of the calling water right. If return flows are replaced upstream of the location of the historical returns then transit losses shall be assessed between the point of release and the location of historic return flows as described in ¶¶ 9.2.2.1 and 9.2.2.2. Nothing herein shall limit Applicant's right to replace return flows directly to Boulder Creek or the St. Vrain Creek, provided that the point of replacement is above the calling water right.
- 9.2.2.1. Idaho Creek Return Flow Location. A point in the SE $\frac{1}{4}$ NW $\frac{1}{4}$ of Section 10, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado, as shown on **Figure 1**.
- 9.2.2.2. Godding Hollow Return Flow Location. A point in the NE $\frac{1}{4}$ SW $\frac{1}{4}$ of Section 11, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado, as shown on **Figure 1**.
- 9.2.3. Sources of Return Flow Replacement. Return flow obligations shall be satisfied by either a portion of the Augmentation Deliveries, releases of water from the reservoirs described in ¶8, deliveries of water from the sources listed in **Exhibit 1** or deliveries of water from other available sources added to the decrees in Case Nos. 03CW99 or 02CW335 for augmentation or replacement purposes under the procedures of such decrees, or any combination of these sources, as long as the sources can be physically delivered upstream of the calling water right located downstream of the historical point of return flow accrual, consistent with ¶9.2.2 of this Decree and are decreed for augmentation uses by the Water Court, approved for replacement use by the State Engineer pursuant to sections 37-92-308 or 309, C.R.S., or successor statutes, or otherwise lawfully available for use as a replacement source.
- 9.3. Dry Up. The majority of the historically irrigated lands shown on **Figure 1**, which lands are located in Section 10, Township 2 North, Range 68 West, 6th P.M. Weld County, Colorado, have been dried up and developed for commercial and residential uses, or

mined, lined, and otherwise permanently removed from irrigation. Central claims dry up of the 252 acres identified on **Figure 1**. Fourteen acres of dry up lands are located in the north half of Section 10, and 238 acres of dry up lands are located in the south half of Section 10, as shown on **Figure 1**. Except when irrigation water is supplied from Consumptive Use Credits (as defined in ¶9.4) from the 7.04 Shares, releases from the Rinn Valley Reservoir, exempt wells permitted by the State Engineer, water supplied by a municipality, a water district or other water supply agency, water from non-tributary or transbasin sources, water supplied pursuant to a substitute water supply plan approved by the State Engineer pursuant to sections 37-92-308 and 37-92-309, C.R.S., or successor statutes, or water supplied pursuant to a subsequent decree approved by the Court, no irrigation of the area labeled, “Dry Up” on **Figure 1** shall occur. Applicant has submitted a dry up report to the Division Engineer which shows the dry up lands. Applicant will submit an additional report if the dry-up acreage changes from commercial, residential, or lined gravel pit to irrigated agriculture. Section 37-92-305(4.5), C.R.S. (2018) requires that dry-up of agricultural land be designed to accomplish the revegetation and noxious weed management of the lands from which irrigation water is removed. The land described in this paragraph is either commercial development or gravel pit and the reclamation work completed on this land has satisfied the statute.

9.4. Future Consumptive Use Credits. The quantity of the 7.04 Shares remaining after Applicant has satisfied the return flow obligations as set forth in ¶9.2 above are the “Consumptive Use Credits” attributable to the 7.04 Shares and may be totally consumed for the uses described in ¶7 without injury to other water users, subject to the terms and conditions of this Decree. In the event the Consumptive Use Credits are delivered to Idaho Creek, Boulder Creek, St. Vrain Creek, or the South Platte River at a time when they are not needed by Applicant, then Applicant may re-divert, or otherwise capture, control, or possess such Consumptive Use Credits to extinction, subject to the limitations contained in ¶¶9.4.1 through 9.4.6.

9.4.1. Re-diversion to Recharge. Applicant may re-divert Consumptive Use Credits for delivery to any existing or future recharge projects that include the 7.04 Shares as a source in a Water Court decree. Re-diversion for delivery to recharge projects decreed in Case No. 05CW331 shall be allowed only after complying with ¶25 of the decree in Case No. 05CW331. Additionally, until such time as Applicant applies for and obtains an amendment to the 05CW331 decree that allows re-diversion into the 05CW331 recharge projects by exchange, such re-diversion is limited to direct delivery under the 05CW331 decree. Nothing in this decree precludes Applicant from applying to the Water Court for new decreed exchanges to one or more of the 05CW331 recharge projects or other future recharge projects that include the 7.04 Shares as a source of replacement supply. Otherwise, Applicant may divert water for delivery to recharge projects by exchange, subject to the terms and conditions in this ¶9.4.1 and in ¶9.4.3 below.

- 9.4.2. Re-diversion by Well(s). Except to the extent that the 7.04 Shares are used in the Orchard Recharge Project decreed in Case No. 05CW331 after complying with ¶25 of the decree in Case No. 05CW331, Consumptive Use Credits shall not be diverted or re-diverted at a well(s) (including an infiltration gallery or other type of groundwater diversion structure), including for delivery to storage, unless Applicant first obtains a subsequent decree authorizing diversion of such water at such well(s).
 - 9.4.3. Exchange. Although Applicant claims the right to use the Consumptive Use Credits as a source of substitution and replacement in an exchange, no appropriative right of exchange is decreed herein. Such water may be used as a source of substitute supply in an exchange only if the exchange is operated for the purposes described in ¶7 and either in accordance with the terms and conditions of a decreed exchange that includes the Consumptive Use Credits as a source of substitute supply or in accordance with administrative approval given in advance by State water administration officials, pursuant to then existing statutory authority.
 - 9.4.4. Storage. Applicant may re-divert, by direct delivery or exchange, Consumptive Use Credits to any storage facilities listed on the attached **Exhibit 1**, and any storage facilities that Applicant, or any of its subdistricts, acquires the right to use in the future, subject to the terms and conditions in this ¶9.4 and in accordance with advance administrative approval by State water administration officials.
 - 9.4.5. Future Irrigation. Future irrigation use of the 7.04 Shares shall be limited to deliveries of the Consumptive Use Credits attributable to the 7.04 Shares from Rinn Valley Reservoir. The place of use shall be the Rinn Valley Parcel as shown on **Figure 2**, and shall be limited to the irrigable ground on such parcel which is approximately 88 acres. Such deliveries shall be measured using measurement devices that are acceptable to the State water administration officials.
 - 9.4.6. Successive Use. Although Applicant claims the right to successively use the Consumptive Use Credits, no plan for successive use, with the exception of the uses described in ¶7 following beneficial use by the storage of water in accordance with C.R.S. §37-92-103(4)(a), or following the operation of an exchange, is decreed herein. Any successive use following other uses described in ¶7 is allowed in accordance with the terms and conditions of a subsequent decree that quantifies the portion of the use that may be used successively.
- 9.5. Augmentation Use. GMS and WAS provide augmentation water to allow the continued operation of alluvial wells during times of senior call, which wells are the subject of

Class B, C, and D contracts with GMS or WAS pursuant to section 37-45-101 et seq., C.R.S. GMS and WAS include lands within Adams, Morgan and Weld Counties. The Consumptive Use Credits associated with the 7.04 Shares shall be used by GMS or WAS to replace out-of-priority depletions for the benefit of wells with Class B, C, or D contracts with those entities. The Consumptive Use Credits associated with the 7.04 Shares may also be used as a replacement source in other augmentation plans subject to the terms of this Decree and the decrees for such other decreed plans, or a substitute water supply plan approved by the state engineer under section 37-92-308, C.R.S., or successor statutes, for the administrative approval of an augmentation plan.

- 9.5.1. Use by WAS in Case No. 03CW99. In the event that the 7.04 Shares are used by WAS, such use under the Augmentation Plan decreed in Case No. 03CW99 (“WAS Plan”) requires the use of the average of the 2002-2006 recorded deliveries in Year One of the Projection decreed therein. Projected deliveries of the 7.04 Shares in Year Two and after of the projection shall be based on the running average of deliveries for the five years immediately preceding the projection or the previous year’s actual deliveries, whichever is less. When computing the average for Year Two and after, the projected deliveries shall be based on the average of the deliveries that occurred in that same month in the preceding five years. The average of the 2002-2006 recorded deliveries, in acre feet, to be used as the Year One projection values for the 7.04 Shares are contained in the following table. The augmentation credit will be projected by multiplying the monthly or annual acre feet farm headgate deliveries in the table below times the appropriate monthly return flow factors set out in ¶9.2.1 to arrive at the monthly return flow obligation, which shall then be subtracted from the corresponding monthly farm headgate delivery in the table below to arrive at the Projection augmentation credit for the months for which deliveries are shown in the table.

Apr	May	Jun	Jul	Aug	Sep	Oct	Annual
48.0	147.6	165.1	193.3	156.5	133	80.4	923.9

- 9.5.2. Use by GMS in Case No. 02CW335. Use of the 7.04 Shares by GMS under the Augmentation Plan decreed in Case No. 02CW335 (“GMS Plan”) requires the use of a “dry-year yield” in the six-year Projection decreed for such Plan. For the purpose of establishing the dry year yield of the 7.04 Shares, the farm headgate deliveries in 1977 were used. The dry-year farm headgate yield of the 7.04 Shares, in acre feet, that shall be used for the projection in Case No. 02CW335, is contained in the following table. The dry year augmentation credit will be projected by multiplying the monthly or annual acre feet farm headgate deliveries in the table below times the appropriate monthly return flow factors set out in ¶9.2.1 to arrive at the monthly return flow obligation, which shall then be subtracted from the corresponding monthly farm headgate delivery in the table

below to arrive at the Projection augmentation credit for the months for which deliveries are shown in the table.

April	May	Jun	Jul	Aug	Sep	Oct	Annual
0	90.5	193.0	129.4	109.8	43.5	11.6	577.9

9.6. Accounting. Deliveries of water pursuant to the 7.04 Shares will be measured daily by continuous recording devices and recorded on an accounting form acceptable to the Water Commissioner and the Division Engineer. Any accounting form used by Applicant shall include the following daily data: the river call by name, priority date, administration number and location, the return flow obligations to Idaho Creek and Godding Hollow and the location, amounts and sources of water used to meet the return flow obligations, the daily delivery of the 7.04 Shares at each augmentation station or reservoir inlet and in total, the Consumptive Use Credits, amount of Consumptive Use Credits leased to other entities, if applicable, the running total of all volumetric limitations for the 7.04 Shares, and an accounting of transit losses incurred pursuant to Paragraph 30. The initial accounting forms are attached hereto as **Exhibit 2**. These accounting forms may be integrated with Applicant's other accounting forms. **Exhibit 2** is not decreed herein, and if otherwise consistent with the provisions of this Decree, may be modified from time to time as required by or with the approval of the Division Engineer and notice to all Objectors in this case, provided that all information contained in **Exhibit 2** and required by this Decree is included. Applicant shall serve notice to Objectors when any changes to **Exhibit 2** are submitted to the Division Engineer. Objectors shall have 35 days from the date of service of notice of changes to the accounting form to provide comments to the Division Engineer regarding such proposed changes.

CHANGE OF WATER RIGHTS – RINN VALLEY RESERVOIR

10. Water Rights to be Changed. Applicant has purchased the Rinn Valley Reservoir Water Rights from L.G. Everist.
11. Previous Decree for the Water Rights. The Rinn Valley Reservoir was decreed in Case No. 05CW315, Water Division 1, decree entered August 21, 2014 (hereinafter the “2005 Storage Right”).
- 11.1. Legal description of location: SW $\frac{1}{4}$ of Section 10, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado; and W $\frac{1}{2}$ of SE $\frac{1}{4}$ of Section 10, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado.
- 11.2. Points of Diversion, which are shown on attached **Figure 2**:

- 11.2.1. The Rinn Valley-Rural Ditch Diversion No. 1 diverts water from Boulder Creek in the NE $\frac{1}{4}$ of Section 20, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado. The point of diversion is the existing diversion structure which is owned by the Rural Ditch Company and which is located on the east bank of Boulder Creek at a point that is approximately 1,400 feet west of the east section line of said Section 20 and approximately 2,275 feet south of the north section line of said Section 20
 - 11.2.2. The Rinn Valley-Rural Ditch Diversion No. 2 diverts water from Idaho Creek in the SE $\frac{1}{4}$ of Section 16, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado. The point of diversion is the existing diversion structure which is owned by the Rural Ditch Company and which is located at a point that is approximately 420 feet west of the east section line of said Section 16 and approximately 1,300 feet north of the south section line of said Section 16.
 - 11.2.3. The Rinn Valley-Idaho Creek Diversion No. 3 diverts water from Boulder Creek in the SW $\frac{1}{4}$ of Section 29, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado. The point of diversion is an existing diversion structure referred to as the Idaho Creek Carrier Ditch and which is located at the mouth of Idaho Creek where Idaho Creek feeds out of the east side of Boulder Creek where it is intersected by Idaho Creek at a point that is approximately 45 feet, more or less, east of the west section line of said Section 29 and approximately 2,560 feet, more or less, north of the south section line of said Section 29.
- 11.3. Sources: Water tributary to the South Platte River from Boulder Creek and Idaho Creek.
- 11.4. Appropriation Date: September 30, 1997.
- 11.5. Total amounts decreed to structure: 325 acre-feet absolute and 2,175 acre-feet conditional (total 2,500 acre-feet) and one refill for all cells for replacement of evaporation losses incurred after the first fill, not to exceed a combined total of 336 acre-feet. The approximate locations of the three cells are shown on attached **Figure 2**.
- 11.5.1. The Rinn Valley-Rural Ditch Diversion No. 1: 40 cfs, absolute.
 - 11.5.2. The Rinn Valley-Rural Ditch Diversion No. 2: 40 cfs, conditional.
 - 11.5.3. The Rinn Valley-Idaho Creek Diversion No. 3: 40 cfs, conditional.

- 11.6. Decreed uses: Drought protection associated with the following specific uses: recreation and piscatorial uses within the reservoir cells; irrigation use on the Rinn Valley Project site; all commercial and industrial uses associated with sand and gravel mining at the Rinn Valley site; and augmentation and replacement associated with L.G. Evert mining operations along the South Platte River and its tributaries. In addition, water was decreed for use for augmentation in accordance with a lease between L.G. Evert and Big Thompson Investment Holdings, LLC, which lease has now expired. The water may be fully consumed by storage and subsequent release and further exchange to the point of extinction.
12. Slurry Wall Liners approved. The Phase 3 cell slurry wall was tested for compliance with the "State Engineer Guidelines for Lining Criteria for Gravel Pits," August 1999, and was approved by the State Engineer's Office by letter dated December 20, 2010. Water was subsequently diverted and stored in the Phase 3 cell in June, 2011 in the amount of 325 AF at a rate of at least 40 cfs. Mining has been completed at the Phase 1 and Phase 2 cells, and the slurry walls have been tested and have been approved by the State Engineer's Office by letters dated June 26, 2017 and September 12, 2017, respectively.
13. Change of Water Right. Applicant seeks to change the use of the 2005 Storage Right to include augmentation, recharge, replacement, industrial, and exchange, in addition to the uses decreed in 05CW315, with the right to totally consume the water, either by first use, successive use, or disposition. Any lease of the 2005 Storage Right to L.G. Evert, Inc. shall be limited to uses within the boundaries of Central and its Subdistricts as they exist now and in the future in a manner consistent with this Decree. Following entry of this decree, the 2005 Storage Right will not be used for the sand and gravel mining operations on the Rinn Valley Project site and the augmentation use associated with the lease with Big Thompson Investment Holdings, LLC referenced in 05CW315. The 2005 Storage Right may be diverted at the locations described in ¶17 below. The water right may be used as a source of augmentation and replacement supply in the plans for augmentation in Case No. 02CW335 and Case No. 03CW99, consistent with the terms and conditions of those decrees, and such other decreed augmentation plans as Applicant, GMS, or WAS shall obtain in the future and which identify the 2005 Storage Right as a source, for replacing well depletions and return flows. The water right may be leased to others for use within the boundaries of Central and its subdistricts as they exist now or in the future and in a manner consistent with this Decree, and in accordance with the terms and conditions of such other decree(s) or approved substitute water supply plans as are applicable to lessees.
 - 13.1. Historic Consumptive Use/Contemplated Draft. The 2005 Storage Right was decreed to be 100% consumptive in Case No. 05CW315. The contemplated draft on the river system of the 2005 Storage Right is 2,200 acre-feet initial annual fill. By this Decree, Applicant relinquishes 300 acre-feet of the initial-fill of the 2005 Storage Right and the refill right for the 2005 Storage Right. Following entry of this decree, the amount remaining conditional of the 2005 Storage Right is 1,875 acre-feet.

- 13.2. Future Consumptive Uses. The contemplated draft of the 2005 Storage Right in ¶13.1 may be totally consumed for the uses described in this ¶13 without injury to other water users, subject to the terms and conditions of this Decree. Applicant may re-divert, or otherwise capture, control, or possess releases of the 2005 Storage Right to extinction, subject to the same limitations contained in ¶¶9.4.1 through 9.4.6 that apply to uses of Consumptive Use Credits.
- 13.3. Diversions of the 2005 Storage Right. Applicant may divert the 2005 Storage Right only when the same is in priority. Applicant shall notify the Water Commissioner prior to diverting the 2005 Storage Right. Prior to diverting the 2005 Storage Right, Applicant shall confirm with the Water Commissioner the flow rate, if any, for water leased by the City of Boulder to third parties for delivery to headgates downstream of the headgate of the Rural Ditch. Unless and until a structure is constructed at or near the Rural Ditch headgate to measure water being bypassed by the Rural Ditch headgate, Applicant shall not divert the 2005 Storage Right at the Rural Ditch headgate if the flow at the gage known as "Boulder Creek at Mouth, near Longmont, CO." (USGS Gage ID# 06730500) is less than the amount of water to be delivered to Boulder's lessees below the Rural Ditch headgate, plus the amount of water determined to be the accretion to Boulder Creek between Rural Ditch headgate and the above-referenced USGS gage. For purposes of this provision, the amount of accretion to Boulder Creek between the Rural Ditch headgate and the USGS gage shall be assumed to be 3.4 cfs, unless otherwise determined by the Water Commissioner.

APPROPRIATION OF CONDITIONAL WATER RIGHTS – RINN VALLEY RESERVOIR

14. Name of Reservoir: Rinn Valley Reservoir.
15. Legal description of location: SW^{1/4} of Section 10, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado; and W^{1/2} of SE^{1/4} of Section 10, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado.
16. Sources: Water tributary to the South Platte River from Boulder Creek and Idaho Creek.
17. Points of diversion, which are shown on **Figure 2**:
 - 17.1. The Rinn Valley-Rural Ditch Diversion No. 1 which is described in ¶ 11.2.1.
 - 17.2. The Rinn Valley-Rural Ditch Diversion No. 2 which is described ¶ 11.2.2.
 - 17.3. The Rinn Valley-Idaho Creek Diversion No. 3 which is described in ¶ 11.2.3.

- 17.4. Idaho Creek Diversion NW will be located on Idaho Creek in the NW $\frac{1}{4}$ SW $\frac{1}{4}$ Section 10, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado.
 - 17.5. Idaho Creek Diversion North will be located on Idaho Creek in the N $\frac{1}{2}$ SW $\frac{1}{4}$ Section 10, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado.
 - 17.6. Godding Ditch Diversion will be located on Idaho Creek in the SW $\frac{1}{4}$ Section 21, Township 2 North, Range 68 West, 6th P.M., Weld County, Colorado. The point of diversion is the existing diversion structure which is owned by the Godding Ditch Company (referred to as the Highlands South Side Ditch).
18. Appropriation date: April 19, 2016.
19. Amounts claimed (hereinafter “the 2016 Storage Right”):
- 19.1. 800 acre-feet, conditional, and one annual refill of 3000 acre-feet.
 - 19.2. The Rinn Valley-Rural Ditch Diversion No. 1: 90 cfs, conditional, combined with diversions at the Rinn Valley-Rural Ditch Diversion No. 2.
 - 19.3. The Rinn Valley-Rural Ditch Diversion No. 2: 90 cfs, conditional, combined with diversions at the Rinn Valley-Rural Ditch Diversion No. 1.
 - 19.4. The Rinn Valley-Idaho Creek Diversion No. 3: 80 cfs, conditional.
 - 19.5. Idaho Creek Diversion NW: 10 cfs, conditional.
 - 19.6. Idaho Creek Diversion North: 50 cfs, conditional.
 - 19.7. Godding Ditch Diversion: 50 cfs, conditional.
20. Uses: Recreation and piscatorial uses within the storage cells; augmentation, recharge, replacement, irrigation, industrial, and exchange. Applicant claims the right to totally consume the consumable portion of the water, either by first use, successive use, or disposition. The water right may be used as source of augmentation and replacement supply in the plans for augmentation in Case No. 02CW335 and Case No. 03CW99, consistent with the terms and conditions of those decrees, and such other decreed augmentation plans as Applicant, GMS, or WAS shall obtain, for replacing well depletions and return flows. The water right may be leased to others for use within the boundaries of Central and its subdistricts as they exist now or in the future and in a manner consistent with this Decree, and in accordance with the terms and conditions of such other decree(s) or approved substitute water supply plans as are applicable to lessees.
- 20.1. Place of Irrigation Use. The Rinn Valley Parcel shown on **Figure 2**.

20.2. Future Consumptive Uses. Applicant may re-divert, or otherwise capture, control or possess releases of the 2016 Storage Right to extinction, subject to the same limitations contained in ¶¶9.4.1 through 9.4.6 for Consumptive Use Credits.

21. Terms and Conditions for Rinn Valley Reservoir

21.1. Operations. Water will be diverted from Boulder Creek and Idaho Creek at the points of diversion described in ¶¶ 11.2 and 17 and at the flow rates described in ¶¶ 11.5 and 19. A portion of the first annual fill, up to 2,200 acre-feet, will be diverted pursuant to the 2005 Storage Right. The remainder of the first annual fill, up to 800 acre-feet, will be diverted pursuant to the 2016 Storage Right initial fill right. Refill of the Rinn Valley Reservoir, up to 3,000 acre-feet, will be diverted pursuant to the 2016 Storage Right. Releases may be made from the reservoir by any lawful means, including but not limited to pumping from the reservoir to Boulder Creek or Idaho Creek, or by pumping to the Rural Ditch for subsequent delivery to the St. Vrain Creek. Except for those provisions which have been expressly modified by this Decree, the Rinn Valley Reservoir shall be operated according to the applicable provisions of the Colorado Division of Water Resources October 2011, Amended February 2016, General Administration Guidelines for Reservoirs, a copy of which is attached hereto as **Exhibit 5**. Water will be delivered through the Rural Ditch pursuant to an agreement between L.G. Everist, Inc. and the Rural Ditch Company dated March 27, 2014, which agreement has been assigned to Central on December 29, 2017, and pursuant to agreements between Central and the Rural Ditch Company, dated June 12, 2002, March 8, 2004, February 20, 2007, and January 6, 2009.

21.2. Measurement. Applicant shall measure all measurable diversions, deliveries to, and releases of water from the Rinn Valley Reservoir on a daily basis using a continuous recording measuring device. The staff gage in the Rinn Valley Reservoir and all existing measurement devices used to measure inflows and outflows from the reservoir have been approved by the water commissioner. The continuous recording measuring device(s) used to record stage of the reservoir will be verified using the staff gage every other week.

21.3. Reservoir Accounting. The accounting is an administrative tool required by this Decree to confirm diversions and releases are in accordance with the terms and conditions of this Decree. Applicant has demonstrated an appropriate method for accounting for diversions and releases of water under this Decree. The initial accounting forms are attached hereto as **Exhibit 3**. These accounting forms may be integrated with Applicant's other accounting forms. **Exhibit 3** is not decreed herein, and if otherwise consistent with the provisions of this Decree, may be modified from time to time as required by or with the approval of the Division Engineer and notice to all Objectors in this case, provided that all information contained in **Exhibit 3** and required by this Decree is included. Applicant shall serve notice to Objectors when any changes to **Exhibit 3** are submitted to the Division Engineer. Objectors shall have 35 days from the

date of service of notice of changes to the accounting form to provide comments to the Division Engineer regarding such proposed changes. Any accounting form used by Applicant shall include the following data: river call in effect each day by date, name, priority date; and administration number; daily diversions of the 2005 Storage Right and 2016 Storage Right measured at the respective diversion points; daily Reservoir deliveries measured at the inlet of the reservoir; daily amounts of unmeasured inflows including precipitation, seepage and local runoff; daily Reservoir surface area (as determined by the reservoir stage) and evaporation (total and by water type if multiple sources of water are stored); daily releases of out-of-priority inflows; daily amounts of water released from the Reservoir; daily amounts of storage in the Reservoir by source (if multiple sources of water are stored); running totals of the fill and refill, any book-over to the 2005 Storage Right or paper-fill of the 2005 Storage Right or 2016 Storage Right imposed by the Water Commissioner or Division Engineer consistent with the Colorado Division of Water Resources October 2011, Amended February 2016, General Administration Guidelines for Reservoirs, and any other information contained on the accounting form attached hereto as **Exhibit 3**. All accounting shall be performed daily and submitted monthly, unless required more often at the reasonable request of the Division Engineer or Water Commissioner. The Accounting shall be made available to any Objector in this case upon reasonable request.

21.4. Water Year. For purposes of accounting for the water stored in the Rinn Valley Reservoir, pursuant to both the 2005 Storage Right and the 2016 Storage Right, and the 2016 Storage Right refill right, the water year shall be April 1 through March 31. Because the water year for the 2005 Storage Right was November 1 to October 31 under the terms of the 05CW315 Decree, any water in storage at the time this Decree is entered shall be carried over into the respective initial fill and refill accounts for the initial April 1 to March 31 water year.

21.5. Unmeasured Inflows. Unmeasured inflows into the Rinn Valley Reservoir (including precipitation, local runoff, and groundwater seepage) shall be calculated daily using the following equation: Unmeasured Reservoir Inflow = Change in Reservoir Storage + Estimated Gross Reservoir Evaporation + Measured Reservoir Releases – Measured Reservoir Inflows. Applicant shall account for all unmeasured inflows and outflows to and from the Rinn Valley Reservoir and return to the stream all out-of-priority inflows to the Rinn Valley Reservoir within 72 hours, unless a lesser timeframe is required in writing by the Water Commissioner or Division Engineer. No appropriation of groundwater is made herein. This includes groundwater inflows into the Reservoir in excess of the State Engineer Guidelines for Lining Criteria for Gravel Pits (1999).

21.6. Evaporation Losses. Evaporation losses from the Rinn Valley Reservoir shall be calculated individually for each cell by multiplying the total ice-free water surface area in acres by gross reservoir evaporation in feet. Real time gross reservoir evaporation in feet shall be determined on a daily basis using the following method: Gross pan

evaporation shall be computed by multiplying daily standard alfalfa reference crop evapotranspiration (ET_r) in feet published by the Northern Colorado Water Conservancy District (NCWCD) for the NCWCD Longmont South weather station, or the NCWCD Fort Lupton station if such data is not available from the NCWCD Longmont South weather station, by 1.2 to determine daily gross pan evaporation in feet. Daily gross pan evaporation shall then be multiplied by a pan coefficient of 0.7 to obtain daily gross reservoir evaporation in feet. At times when alfalfa reference ET_r data are unavailable, the Applicant shall use the following monthly evaporation rates, which are in feet per day:

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
0.003	0.004	0.006	0.010	0.013	0.016	0.016	0.015	0.011	0.008	0.004	0.003

21.7. Design Performance. The liners for each of the cells comprising the Rinn Valley Reservoir have been approved as of the date of this decree. If a liner fails as defined in paragraph 5.0 of the August 1999 State Engineer Guidelines for Lining Criteria for Gravel Pits (“1999 SEO Guidelines”), Applicant shall be required to repair the lining in accordance with the requirements of that paragraph as the same may be amended or modified. If the Reservoir’s liner fails, then any out-of-priority depletions of groundwater evaporation from the pond must be replaced in accordance with a plan of augmentation approved by the Court or substitute water supply plan approved by the Division Engineer.

21.8. Stage-Area-Capacity: Stage area capacity tables for each of the cells comprising the Rinn Valley Reservoir have been developed as of the date of this Decree and are included in **Exhibit 4**. The stage-area-capacity tables represent the maximum volume that can currently be stored in each reservoir cell. If additional space should be made available following the entry of this Decree (up to the amount decreed herein) in the cells comprising the Rinn Valley Reservoir, Applicant shall provide notice to the Water Commissioner, Division Engineer, and parties of record in this case describing the additional volume and include an updated stage area capacity table or tables. Central shall maintain a staff gage in Rinn Valley Reservoir that indicates water levels within one-tenth of a foot. When accounting for the volume of water within Rinn Valley Reservoir, Central shall interpolate the volume of water in storage based on such staff gage readings and the calculated difference in volume between each contour level provided in **Exhibit 4**.

CONCLUSIONS OF LAW

22. The Findings of Fact set forth above are incorporated herein.
23. Notice and Jurisdiction. The Water Court for Water Division No. 1 has jurisdiction over the subject matter of these proceedings and over all persons, owners of property and water rights

that may be affected hereby, pursuant to §37-92-203(1), §37-92-302 and §37-92-304, C.R.S. whether or not they have chosen to appear. The application in this matter and the resume publication placed such persons on notice of the relief requested by the application and granted by this decree.

24. Statements of Opposition. Statements of opposition were filed by the parties named in ¶3. No other statements of opposition have been filed and the time for filing statements of opposition has expired.
25. Burden of Proof. Central has met its burden of proof and is therefore entitled to a decree approving the changes of water rights and appropriation for a water right described herein.
26. Changes of Water Rights Contemplated by Law. The changes of water rights described in ¶¶4-9 and 10-13 of this Decree are contemplated by law and satisfy the requirements of §§37-92-101 *et seq.*, C.R.S., including but not limited to §§37-92-103, 37-92-302, 37-92-304(6), and 37-92-305(3), C.R.S.
27. No Injury. The Court determines that the changes of water rights herein are authorized by law, and if operated and administered in accordance with the terms and conditions of this Decree, will not result in injury to vested water rights and decreed conditional water rights of others. Therefore, Applicant is entitled to a Decree approving the changes of water rights herein. §37-92-305(3), C.R.S.
28. Appropriation of Water Storage Rights Contemplated by Law. The appropriation of the 2016 Storage Right in this case is contemplated by law and satisfies the requirements of §§37-92-101 *et seq.*, C.R.S., including but not limited to §§37-92-103, 37-92-301, 37-92-302, and 37-92-304, C.R.S.

JUDGMENT AND DECREE

29. The Findings of Fact and Conclusions of Law set forth above are incorporated herein.
30. Transit Losses. Central shall be responsible for reasonable stream transit losses that are assessed by the Division Engineer or Water Commissioner, if any, for all circumstances where Central is using the natural stream channel to transport water to the point of replacement of depletions or return flows or to the point of rediversion to storage or recharge. When water is used in the GMS Plan or WAS Plan, then assessed transit losses will be in accordance with ¶ 40 and ¶ 23.3 of such plans, respectively. When water is not used in the GMS Plan or WAS Plan, transit losses shall be assessed in the same manner and at the same rate as for other water users on Boulder Creek, Idaho Creek, St. Vrain Creek, and the South Platte River as determined by the Division Engineer or Water Commissioner.
31. Stipulations and Settlements. The Stipulations entered into between Applicant and Objectors are approved by the Court.

32. Exchange, Recharge, and Augmentation Uses. Although this decree adjudicates exchange, recharge, and augmentation as uses of the Shares as changed herein as well as exchange, recharge, and augmentation uses for the changed 2005 Storage Right and the 2016 Storage Right, no specific exchange, recharge, or augmentation plan is approved herein. The operation of any exchange, recharge or augmentation plan involving the 7.04 Shares as changed herein, the 2005 Storage Right, or the 2016 Storage Right must be in compliance with Colorado law, and in compliance with the terms and conditions of any applicable decree.
33. No Ditchwide Applicability. This decree does not quantify historical consumptive use by the “ditch-wide method,” see *Williams v. Midway Ranches Property Owners’ Assoc.*, 938 P.2d 515, 521, 526 (Colo. 1997), and thus does not set any precedent for future changes of water rights associated with other shares of capital stock in the Rural Ditch Company.
34. Integrated Supply. The Water Rights described herein are part of Applicant’s integrated water supply for augmentation and other purposes. Applicant continues to purchase and change water rights and construct and adjudicate recharge and storage projects to integrate additional sources of water into its water supply plan. The integrated water supply plan includes, but is not limited to those rights listed on **Exhibit 1**, attached hereto.
35. No Material Injury. The terms and conditions provided for in this decree are adequate to assure that no material injury to any water users will result from operation of the changes of water rights.
36. Administration. The State Engineer and Division Engineer shall administer this decree in accordance with the terms and conditions set forth herein. The Division Engineer, or his designated representative, will administer all such water transported in the South Platte River or its tributaries under this Decree, including water for replacement of depletions or return flows, past intervening headgates to ensure that such water is not intercepted or otherwise diminished in quantity by diversion, use or other interference by intervening water rights and to assure that such water remains available and suitable for Applicant’s uses under this Decree. In the event that administration of a delivery past intervening headgates requires the installation of a bypass structure or the use of an existing bypass structure by agreement with a third-party, Applicant is responsible for either installing a new bypass structure with a continuous recording measuring device(s) as approved by the Water Commissioner or securing an agreement with a third-party to use an existing structure or install a new structure and providing such information and agreement to the Division Engineer.
37. Use of Structures. Nothing in this Decree creates or enlarges any right of Applicant to utilize land or structures owned by parties other than Applicant for the diversion of water, and nothing in this Decree enlarges any right currently possessed by Applicant for use of lands, structures, or facilities. Applicant may utilize existing water diversion and carriage structures only to the extent that it has acquired the right to use such structures from the appropriate

entities or by other lawful means. Similarly, Applicant may utilize land for the construction and operation of such structures only to the extent it has acquired the right to use such land.


38. Measuring Devices. In addition to the measuring and recording devices expressly required herein, Central shall install and maintain, at Central's expense, such additional meters, gauges, or other measuring and recording devices required by the Water Commissioner or Division Engineer, and in addition to the accounting and reporting expressly required herein, shall report at such additional reasonable times to the Water Commissioner and/or Division Engineer the readings of such meters, gauges, or other measuring devices pursuant to CRS § 37-92-502(5)(a).
39. Retained Jurisdiction. Pursuant to C.R.S. 37-92-304(6), the Court shall retain jurisdiction over the changes of water rights for the 7.04 Shares and the 2005 Storage Right approved herein on the question of injury to the vested rights of others for a period of five (5) years from the date of entry of this Decree. The Court's retained jurisdiction may be invoked by any party to this case by petition, with notice to all other parties. The petition shall set forth with particularity the factual basis for the specific injury alleged, together with proposed decretal language that the petitioner contends would remedy or prevent the alleged injury that is the basis for the petition. The party lodging the petition shall have the burden of going forward to establish the *prima facie* facts supporting the claimed injury alleged in the petition. If the Court finds those facts to be established, Central shall bear the burden of proving (a) that any modifications sought by Central will avoid injury to other appropriators, or (b) that any modification sought by an Objector is not required to avoid injury to other appropriators, or (c) that any term or condition proposed by Central in response to Objector's petition does avoid injury to other appropriators. Any such petitions shall be filed with the Court under the above-styled caption and case number and shall be served on counsel of record for all parties who have appeared herein. Objections to any such petition shall be filed no later than 63 days after service of the petition on the parties hereto. If no such petitions are lodged within the five year retained jurisdiction period, and if the retained jurisdiction period is not extended by the Court in accordance with the provisions of statute, this Decree shall become final under its own terms.
40. Approval of Changes of Water Rights. The change of 7.04 Shares set out in ¶¶4-9 and the change of the 2005 Storage Right set out in ¶¶10-13 are hereby confirmed, approved, adjudicated and decreed subject to the terms and conditions contained in this Decree.
41. Storage Water Right Decreed. The 2016 Storage Right is hereby decreed in the volumes and flow rates described in ¶19. All amounts are conditional.
42. Priority. The application for the 2016 Storage Right was filed in the water court in the year 2016 and this water right shall be administered as having been filed in that year, and shall be junior to all water rights for which applications were filed in previous years. As between the 2016 Storage Right confirmed herein and other rights for which applications were filed in

2016, priority shall be determined by the decreed dates of appropriation and shall not be affected by the date of entry of decrees.



43. Conditional Portion of 2005 Storage Right. A portion of the 2005 Storage Right remains conditional, as described in paragraphs 11.5 and 13.1 herein. The deadline for an application for reasonable diligence on such conditional water right is August 31, 2020, as decreed in Case No. 05CW315.
44. Diligence. The conditional water rights decreed herein are continued in full force and effect until January 31, 2025. If Applicant desires to maintain such conditional rights, an application for finding of reasonable diligence shall be filed on or before January 31, 2025, or a showing made on or before such date that the conditional water rights have become absolute water rights by reason of the completion of the appropriation.
45. Pursuant to Rule 9 of the Uniform Local Rules for All State Water Court Divisions, upon the sale or other transfer of the conditional water rights decreed herein, the transferee shall file with the Division 1 Water Court a notice of transfer which shall state:
 - (A) The title and case number;
 - (B) The description of the conditional water right transferred;
 - (C) The name of the transferor;
 - (D) The name and mailing address of the transferee; and
 - (E) A copy of the recorded deed.

The owner of said conditional water rights shall also notify the Clerk of the Division 1 Water Court of any change in mailing address. The Clerk shall place any notice of transfer or change of address in the case file of this Case No. 16CW3119.

DATED January 25, 2019.

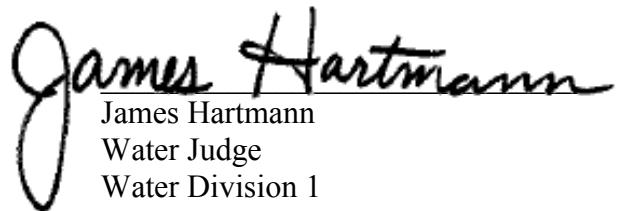

James Hartmann
Water Judge
Water Division 1

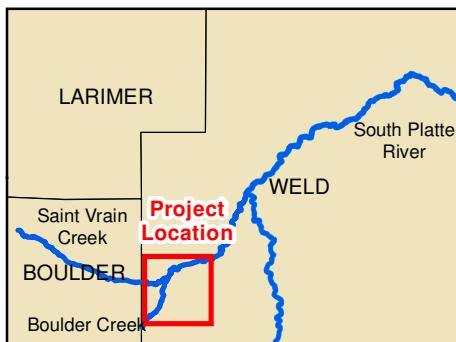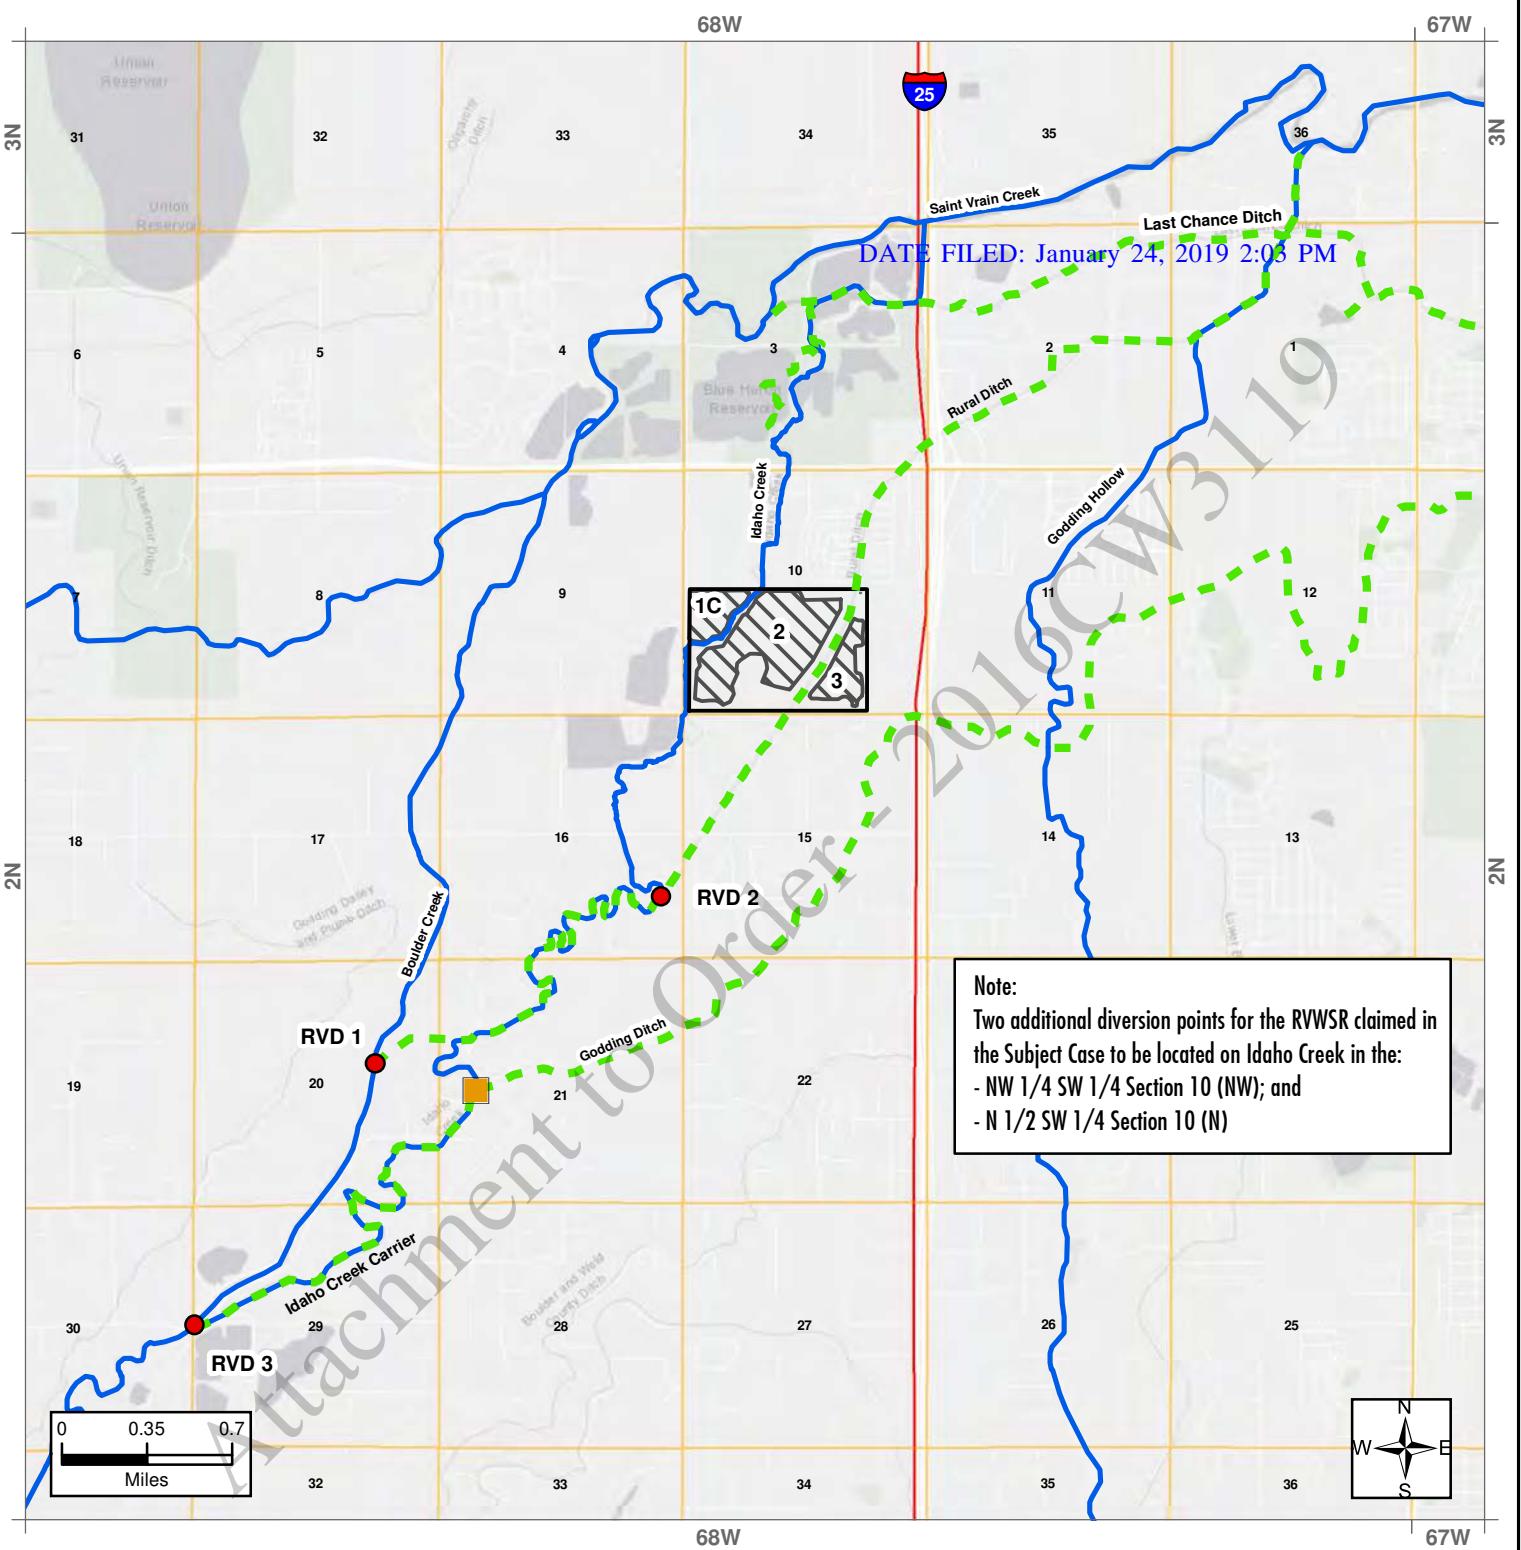


- Diversion Point (05CW315 and 16CW3119)
- Diversion Point (16CW3119 only)
- ▨ RVWSR
- ▢ Rinn Valley Parcel

May 2018


FIGURE 2
CASE NO. 16CW3119



68W

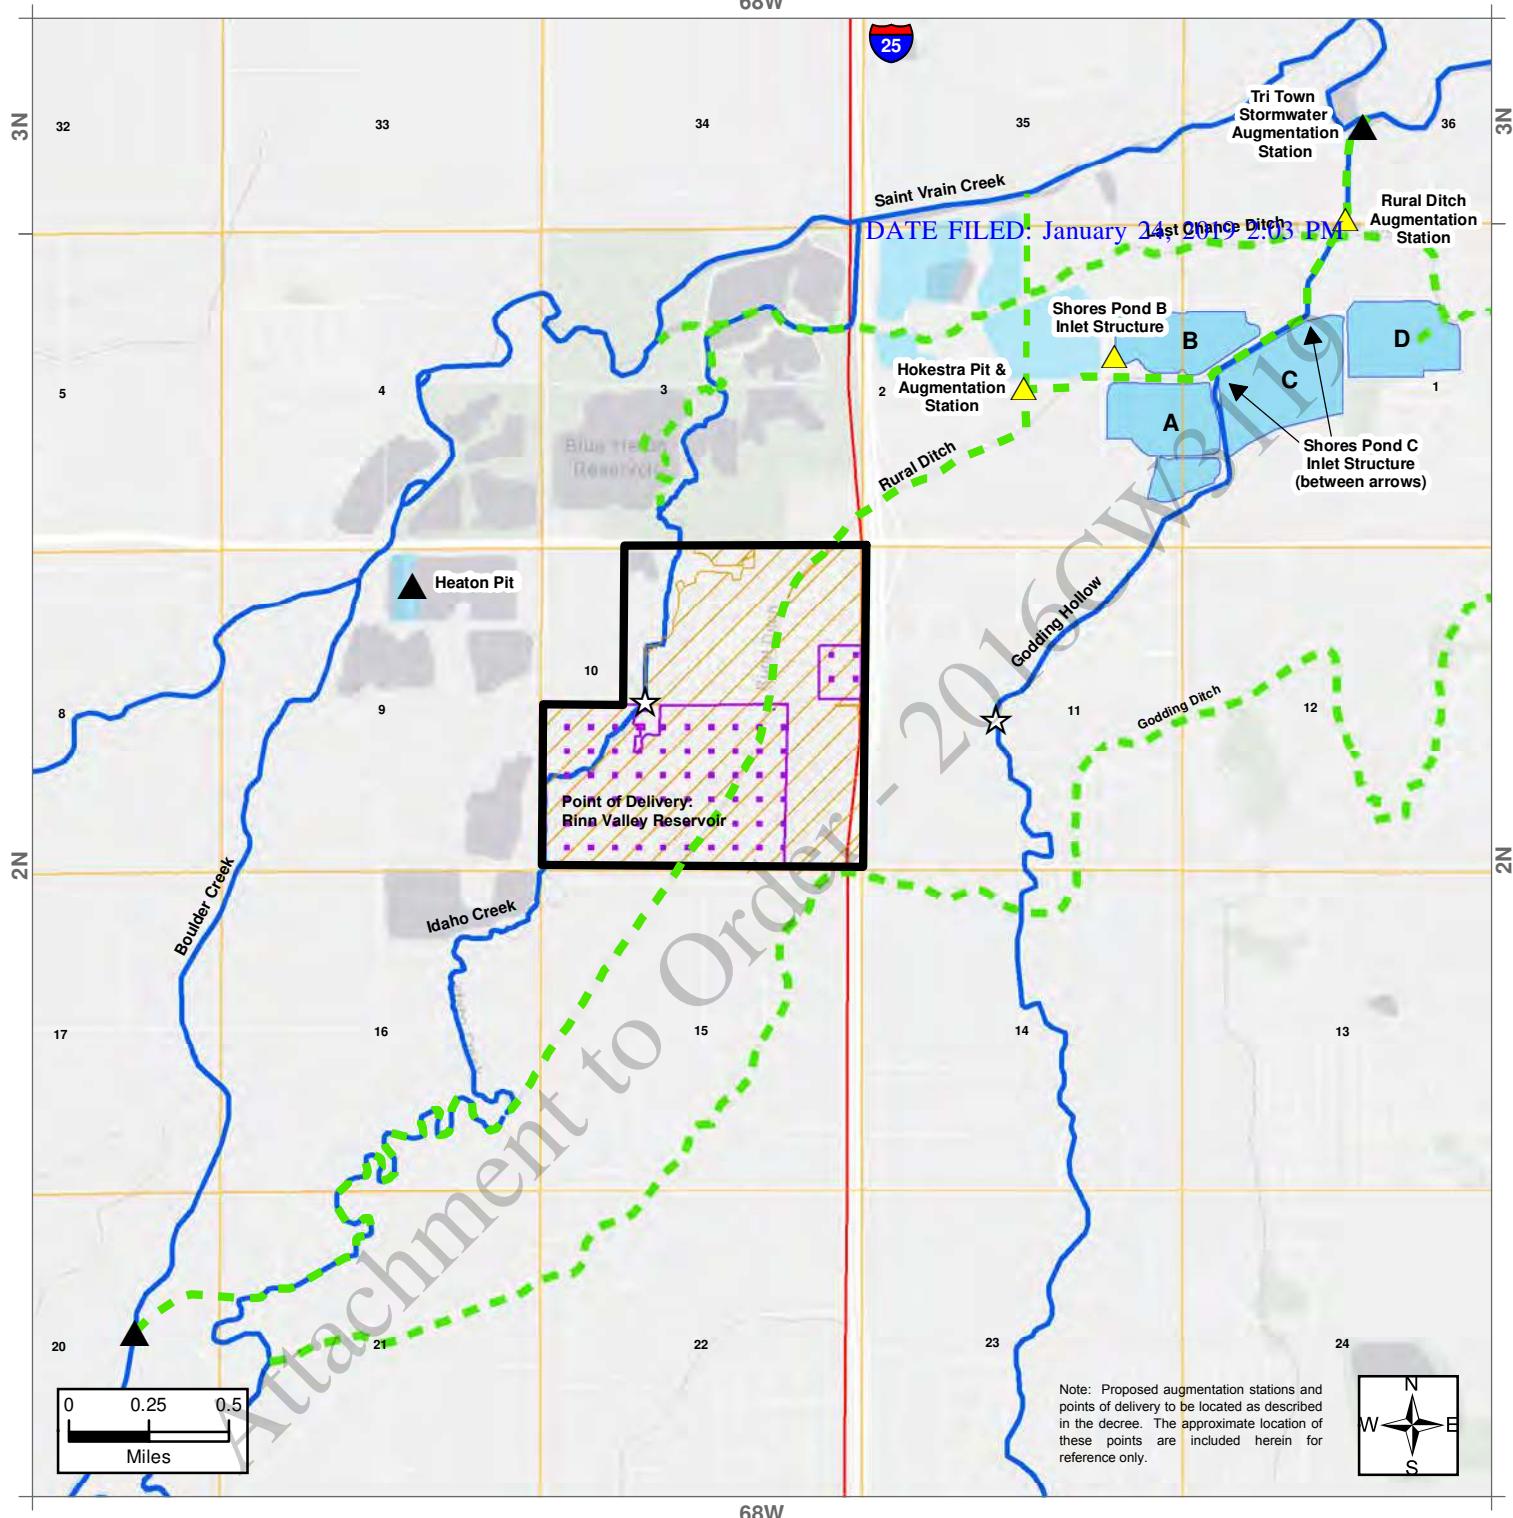

68W

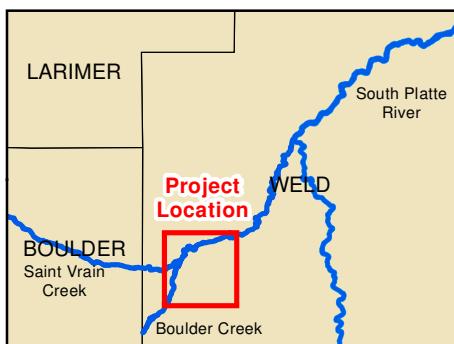

October 2018

- ★ Historical Return Flow Point
- ▲ Augmentation Station/Point of Delivery (Proposed)
- ▲ Augmentation Station/Point of Delivery (Existing)
- Camenisch Farm
- Dry Up Claimed in Case No. 16CW3119
- Maximum Extent of Historically Irrigated Lands

FIGURE 1
CASE NO. 16CW3119



The mapping contained within this document is intended to be used for reference purposes only and is not suitable for construction and/or surveying purposes.

GENERAL ADMINISTRATION GUIDELINES FOR RESERVOIRS¹

Colorado Division of Water Resources DATE FILED: January 24, 2019 2:03 PM

October 2011
Amended February 2016

Purpose.....	2
Introduction	3
General Administration Principles.....	4
One Fill Rule	4
Carryover	6
Decreed versus Physical Capacity	8
Storable Inflow	10
Refill Rights.....	12
Paper Fill, Including Bookover.....	13
Out of priority Upstream Storage Statute.....	18
Evaporation.....	20
Seepage	22
Volumetric versus Gage Height Decrees.....	23
Transit (Conveyance) Losses.....	25
Exchanges	25
Temporary Detention (72-Hour Rule).....	26
Surcharge Storage.....	27
Adequate Measurements	27
Accounting Principles.....	29
Administrative Accounts (Owe-The-River Account).....	30
Enforcement Principles	31
Installation of Measurement Device or Reporting Orders	31
Storage Release Orders	31
ADDITIONAL INFORMATION	33
Dam Safety Restriction and Breach Orders	33
Dead/Active Storage	33
Underground Storage.....	34
Subgrade Storage	34
Types of Dams	37
Jurisdictional versus Non-jurisdictional.....	38
Livestock Water Tanks.....	39
Erosion Control Dams	40
Other Regulatory Requirements	41
Compensatory Storage Doctrine (Transbasin Storage Agreements)	42
Revision Log	44

¹ This document was originally prepared under the direction of Hal Simpson, former State Engineer, and further revised under the direction of Dick Wolfe, State Engineer. Several staff members of the Colorado Division of Water Resources, from both the Denver office and the division offices, were instrumental in its development, which also included legal oversight from the Attorney General's Office.

Purpose

These Reservoir Operating Guidelines are a basic practical guide for the staff of the Division of Water Resources (“DWR”), including division engineers, water commissioners and others charged with administering the state’s many reservoirs. They reflect the “institutional knowledge” of DWR personnel and the general practice across the state, summarizing DWR’s understanding of the statutes, court cases, and administrative rules, policies, and practices related to the storage of water. These Guidelines are intended to provide present and future staff with an understanding of the basic concepts, giving them a common starting point for the many difficult decisions that they must make on a daily basis. We also hope that these Guidelines will be useful to reservoir operators, engineers, attorneys, policy makers and anyone else who seeks a better understanding of general reservoir operations in the State of Colorado.

These Guidelines should not be relied upon for administrative or legal authority, and they are not intended to be or to function as rules or regulations governing the storage of water. Although these guidelines present fundamental examples of reservoir operations, they do not, and could not, cover all of the historic exceptions that exist for specific reservoirs. Given the significant variation in the decrees granting storage rights, in the physical setting and hydrology of the various reservoirs, and in historical administrative practices, nothing in this document should be construed as definitive with regard to any particular reservoir or storage right. Moreover, DWR does not intend for these Guidelines to change the vested rights of any water user. As changes in the law, altered circumstances, and unforeseen situations arise, DWR will periodically update these Guidelines so that they remain as accurate as possible.

Introduction

Storage of water continues to be a critical component of water supply in Colorado. While State Records show needs of agriculture — the largest use of water in the state — remain fairly constant, water needs for municipal, industrial, environmental and recreational purposes continue to increase. Moreover the administration of interstate compacts, agreements, and treaties, along with the federal government's claims for reserved water rights, are all becoming increasingly important in allocating the remaining waters of Colorado.

The most senior water rights on Colorado streams are direct flow rights, first developed by the earliest settlers in the mid-19th century. Water for direct flow usage was usually plentiful during spring and early summer runoff, but began to diminish in late summer and early fall until it could no longer be diverted. In the most developed areas, such as the South Platte River basin, competition for water led to curtailment of junior rights during the summer and even during the spring in drier years after only several decades of settlement. The seasonal as well as annual fluctuations in water availability, combined with the increasing demand by junior appropriators, led irrigators to capture and store for later use some of the vast quantity of the annual spring runoff from the Rocky Mountain snowmelt. The right to store water was affirmed by the Colorado legislature in 1879 and has become an integral part of the state's water supply.²

The task of administering the state's water has been given to the State Engineer, who is appointed by the governor as the Director of DWR, also known as the State

² Corbridge, James N. Jr. and Teresa A. Rice. 1999. *Vranesh's Colorado Water Law. Revised Edition.* University Press of Colorado, Niwot, CO. p 53.

Engineer's Office (SEO). The State Engineer appoints division engineers who, in turn, manage local water commissioners, all of whom are charged with administering and distributing the waters of the state, including the determination of the way a water user exercises a storage priority.

General Administration Principles

One Fill Rule

Water may either be stored under a water right under the priority system or in some situations contractually – for instance a user may be able to store reusable water in a reservoir. The one fill rule concerns the storage of water under the priority system. Under Colorado law, a water user may store water whenever the water is physically available, its water right is in-priority, and the decree for the water right has not been filled. Under Colorado Supreme Court decisions, a user is entitled to only one filling of a reservoir water right in any one year unless a user has a water right that provides for a refill and/or additional storage or free river conditions exist (i.e. no downstream shortage of water to meet the demands of all users for their decreed water rights).

In creating this rule, courts did not define a storage year. Given that irrigation reservoirs typically begin filling in the fall, after irrigation has been completed, the SEO, starting with State Engineer M.C. Hinderlader³ in 1936, adopted a “seasonal year” of November 1 to October 31. The Colorado Supreme Court has recognized this seasonal year for irrigation reservoirs. This is the presumed seasonal year for a majority of reservoirs unless the decree specifies a different date. Subsequently, different

³ Letter from M.C. Hinderlader, State Engineer, to all Division Engineers and Water Commissioners dated May 11, 1936. Please see Appendix for document.

seasonal years have been adopted by some municipal water suppliers at a set date in the spring, usually April 1 prior to spring runoff when their reservoirs are generally near their lowest point. While this date can vary between municipal suppliers, it cannot be changed once established.

Under the one-fill rule, a reservoir user may only use a storage right to “call” for water during the seasonal year if the decree for the storage right has not yet been filled during that year. (When a user with a decree is short water to meet their decreed demand, the water commissioner will place a “call” or “curtail” users such that no user junior to the “call” in a reach of river may divert in that reach of river.) If the storage right has been filled, the reservoir owner must wait until the beginning of the next seasonal year to place a call for additional water. For example, if a reservoir with a seasonal year beginning November 1 has received the full amount of water it is entitled to under its storage right by June 1, then the user must wait until the next November 1 to begin filling again under that right. In addition, any diversions prior to November 1 will be curtailed if there is a call on the river, whether junior or senior to the storage right.

The reservoir owner could, however, divert water under free river conditions. Alternatively, the reservoir owner could store under a junior priority (either a refill right or separate storage right) or store foreign water. For purposes of this document, the term “foreign water” refers to all water located in a given reservoir except priority storage water associated with the particular reservoir and water stored under free river. Examples of foreign water include: historical consumptive use credits from changed water rights, transbasin water, nontributary water, priority (or free river) water stored by

another structure and relocated to the subject reservoir, recaptured return flows from fully consumable water such as lawn irrigation return flows, etc.

Carryover

Generally, any water remaining in a reservoir at the end of the seasonal year is called “carryover water,” and is credited to the next year’s fill. This will limit the amount of new water to be put into storage during next year’s seasonal year. For example, if a reservoir’s decreed and physical capacity is 100,000 acre-feet and at the end of seasonal year 1 it contains 60,000 acre-feet, then the carryover would be 60,000 acre-feet for the next year, seasonal year 2. In this situation, the Division Engineer or Water Commissioner would limit the amount the owner could divert and store in seasonal year 2 to 40,000 acre-feet because the 100,000 acre-foot water right is filled once the 40,000 acre-feet is stored. The 40,000 acre-foot limit would exist even if the owner released water from storage during seasonal year 2 and created additional capacity. In this situation, this additional capacity can only be refilled under free river conditions since no other storage rights exist.

Moving from a reservoir with a single storage right to the next simplest case where a single owner has a senior storage right and a junior enlargement for the same uses, the Division Engineer may account for reservoir storage using the principle of “first in, first out” so long as the decrees do not have contrary provisions.⁴ For instance, suppose an irrigation reservoir owner has a senior right for 5,000 acre-feet and a more junior right for 9,000 acre-feet to fill a 14,000 acre-foot reservoir. In year 1, the reservoir

⁴ State Engineer’s “Written Instruction and Order 2007-02: Instruction and Order Concerning the Administration of Storage Rights by Seniors First” signed May 31, 2007 by Hal D. Simpson (<http://water.state.co.us/DWRIPub/Documents/wio2007-02.pdf>).

starts empty, is completely filled under the two rights, and releases 7,500 acre-feet during the irrigation season leaving 6,500 acre-feet in the reservoir. Under the “first in, first out” methodology, the reservoir owner may fill 5,000 acre-feet under the senior fill right and the remaining 2,500 acre-feet under the junior right in year 2.

In more complex situations, where multiple owners, types of uses or places of use are involved, the user(s) must keep separate accounts of the various water rights. A basis for keeping separate accounts must first be established by the owner(s) and approved by the Division Engineer. If separate accounts for each water right are tracked then water stored under a junior right would only be carried over into the junior right’s account. In complex situations, all carryover is credited to the most senior storage right in the reservoir at the start of the subsequent year if separate accounts for each priority are not tracked.

Similarly, any foreign water that is stored in a reservoir that is remaining in the reservoir at the end of the season is assumed to be priority water and credited to the most senior storage right unless this water is tracked separately by the reservoir owner. Therefore, detailed accounting of all the different types of priority and foreign water stored in a reservoir is important to avoid limiting the amount of water that can be stored under the most senior storage right.

If the water right for a reservoir allows water stored in priority to be relocated in another structure, the amount of priority water that was relocated to another structure still remaining in that structure at the end of the season counts against the storage right it was originally stored under. This is done to assure that a user does not use a senior right to fill more than one reservoir. For example, assume that municipal reservoir A

has a right for 1,000 acre-feet which is stored in priority during year 1. Also assume during year 1 that 400 acre-feet of the water stored in reservoir A is released and relocated in reservoir B and the remaining 600 acre-feet is released to municipal use. In this case, reservoir A would be entitled to store 600 acre-feet in year 2 not 1,000 acre-feet. The user would only be able to fill the remaining 400 acre-feet in reservoir A in the seasonal fill year subsequent to its release from reservoir B for use. Further, there may also be limits placed on how much the user may store in reservoir B depending on the situation.

Decreed versus Physical Capacity

Given the large investment required for reservoir construction, a potential reservoir owner generally receives a decree for a conditional water right to store an amount of water prior to construction. Upon completion of the reservoir, the actual physical capacity of the reservoir may be different from the decreed capacity. This raises the question of whether the physical capacity or the decreed capacity controls the administration of the amount of water that can be stored. If the physical capacity is less than the decreed capacity, then the allowed amount of fill will be based upon the physical capacity rather than the decreed capacity. For example, when a reservoir is physically full at 50,000 acre-feet and has a decreed capacity of 60,000 acre-feet then the reservoir has reached its one fill and cannot come back in later in the season when space becomes available to fill the additional 10,000 acre-feet. The difference between the decreed capacity and the lower physical capacity is subject to abandonment (or if conditional, to cancellation for failure to prove diligence) unless the reservoir owner

shows intent to make subsequent modifications to enlarge the reservoir to the originally decreed capacity.

When physical capacity is greater than decreed capacity, a fill is based upon the decreed capacity. To use the additional capacity, the reservoir owner must adjudicate a new water right for the difference, use other foreign water legally available for storage in the reservoir, or hope to fill the difference under free river conditions.

Storage Under a Conditional Water Storage Right

Pursuant to 37-92-103(4)(a), beneficial use includes the impoundment of water for storage for any purpose for which an appropriation is lawfully made. As such, a decreed conditional water storage right can be made absolute for all decreed purposes to the extent of the volume of the appropriation that has been captured, possessed, and controlled at the decreed storage structure, CRS 37-92-301(4)(e).

For a newly constructed reservoir, to which a conditional water storage right has previously been decreed, the owner of said reservoir and water storage right simply has to show how much water can be and has been stored in the reservoir. However, in order to store water under a conditional water right in a reservoir with absolute water right(s) already decreed to it for the same purpose(s), separate accounting of each of the water rights must be maintained so that the water right owner(s) can show if and when the conditional water right was stored in what amount. Absent such evidence, the conditional water right cannot be made absolute. As with a storage structure decreed with only absolute water rights, senior water rights shall be considered as having been stored first. For example, consider a reservoir that has a decreed right for 1,000 acre-feet of storage for municipal uses that has been made absolute and the reservoir has

recently received a decree for a junior refill right of 1,000 acre-feet for municipal uses. The reservoir may store under the junior conditional right, and make that right absolute, but only to the extent that the reservoir owner can show that the junior water was stored after the entire 1,000 acre-feet was stored under the senior right, and limited to the amount that the senior right was released for its decreed beneficial use. Any amount of the senior right that was released for a use other than its beneficial use would remain in the reservoir as a paper fill, as further described in the Paper Fill, Including Bookover section below. In this example, if the reservoir releases 100 acre-feet of water stored under the senior right for municipal uses and another 100 acre-feet for the non-decreed use of enhancing stream flows, the reservoir would be considered to be filled with 800 acre-feet of physical water and paper filled with another 100 acre-feet under the senior right. The reservoir could store and make absolute only 100 acre-feet under its conditional junior storage right.

Storable Inflow

Storable inflow is the amount of water that is physically and legally available for storage in a reservoir under a particular water right. After the beginning of the seasonal year, all storable inflow must be accounted against the storage right in order to protect other water users, whether or not the reservoir owner actually stores the water. This assures junior water right users that they will be able to divert water in the amount and time that they could have if the senior storage right had filled with all water available to it under its storage priority. For example, if a reservoir operator with a decree to store 20,000 acre-feet of water chooses to bypass 5,000 acre-feet of water that they would otherwise have been able to store in-priority, the Division Engineer considers the

bypassed water “storables inflow.” Accordingly, the Division Engineer would credit the bypassed water toward the fill of the reservoir and would consider the storage right to be filled when the reservoir physically contains 15,000 acre-feet of water stored under the storage right.

Storable inflow also includes any out of priority storage by upstream junior storage rights (further discussed in the Out of priority Upstream Storage Statute section below). To track the amount of storables water that has not actually been stored, for whatever reason, the Division Engineer uses what is known as a “paper fill.” A paper fill is an accounting mechanism whereby storables inflow is charged against a storage water right either because the reservoir owner elected not to physically divert or store water under that right or a junior upstream reservoir diverted the storables inflow out of priority. A detailed discussion of paper fill, along with some of the exceptions to the general principle of storables inflow, can be found in the Paper Fill Including Bookover section below.

Generally, a storage right is filled when carryover storage under that water right plus storables inflow, whether actually diverted or only a paper fill, equals the decreed amount of the storage water right or the total physical capacity of the reservoir (which may be restricted due to dam safety or flood control concerns), whichever is less. A reservoir user may continue to physically store water under a fill right even if it has gone out of priority and is called out if it comes back into priority and has not already been filled. In this case, storage is limited to the volume unfilled by the storage right when the reservoir went out of priority. Even if there is capacity to store, the Division Engineer will not allow the reservoir operator to continue to store water beyond that point, unless

free river conditions occur, the reservoir has supplemental storage rights that come into priority (such as a refill right or junior storage rights), or the reservoir owner is storing foreign water. Water users may divert beyond the measure of their decrees during free river conditions because this does not infringe upon the rights of other water users.

The water level in a reservoir does not have to be rising or increasing in order for storage to occur and new water can be placed into storage in a reservoir at the same time as previously stored water is being released.

Refill Rights

Some reservoirs operate under decrees that provide for refill rights. A refill right typically has a later priority than the original storage right. However, if the reservoir owner applied for a refill right in the original application, the owner may have been given a right to store under the same priority of the original appropriation after the reservoir achieves its first fill and capacity becomes available. Available capacity for a refill right in a reservoir is created by evaporative and seepage losses in addition to actual storage releases. Storage that is held as the subject reservoir's water right at another location is not included in the available refill capacity of the subject reservoir. While this space cannot be filled under a refill right until the storage held at the other location has been released and put to use, the subject reservoir could be filled under a separate junior storage right for the subject reservoir, under free river conditions or with foreign water.

In the case of a conditional refill right, the owner of the reservoir and water storage right must show how much water has been stored as a refill in order to make all or a portion of the right absolute.

Paper Fill, Including Bookover

As discussed above, a paper fill is an accounting mechanism whereby storable inflow is charged against a storage water right either because the reservoir owner elected not to physically divert or store water under that right or a junior upstream reservoir diverted the storable inflow out of priority. A paper fill may also be used in the accounting for a reservoir if it releases water stored in priority without using the water for its decreed beneficial use. Some examples of paper fill are described below, followed by a discussion of some of the exceptions to the general rule. These are not meant to be exhaustive on this issue, but should provide an understanding of the most typical situations.

Examples of where a paper fill would be used:

1. A reservoir may have multiple rights. For example, it may have a senior storage right and a junior storage right for additional decreed uses. If water is stored under the junior right before the senior right is filled, then a paper fill for the amount stored and credited under the junior right will also be charged against the senior storage water right, to the extent that it remains unfilled. Once the senior right is filled (either physically or on paper), the junior right may continue to store under its own priority unless it is (or until it becomes) filled.
2. A paper fill is charged against a water storage right when a reservoir cannot be filled to its decreed capacity because of a flood control limitation on storage (unless flood control is a decreed beneficial use) or because of a State Engineer storage restriction on the dam.

3. A paper fill is charged if sedimentation has occurred limiting the reservoir's physical capacity.
4. A paper fill is charged when actual storage in the reservoir includes foreign water that limits the capacity of the reservoir to fill under a senior priority unless the owner of the senior priority books over the foreign water in the reservoir to the senior right at the rate that the senior right would have filled the space taken up by the foreign water.
5. A paper fill is charged for any exchange on natural flow into the reservoir for foreign water. For example, assume an on-stream reservoir user exchanges 20 cfs of foreign water into the reservoir by making release of a substitute supply downstream at the same time the user is entitled to fill the reservoir in priority. In this example, the reservoir would be paper filled for the 20 cfs or approximately 40 acre-feet each day the exchange occurred.

In examples 1 – 5 above, the paper fill remains throughout the entire fill season. At the end of the fill season, the physical amount of water is booked over to the senior right and the paper fill is removed.

6. A reservoir will be considered to be paper filled beyond the fill season in the amount of water that is released for a use that is not a decreed beneficial use. For example, consider a reservoir decreed for only municipal uses that has filled to its capacity of 1,000 acre-feet. The reservoir releases 100 acre-feet to enhance instream flows or to the incidental benefit of any other water user on the

river, which release becomes waters of the state and is allocated according to priority of water rights on the river. The reservoir would remain physically full in the amount of 900 acre-feet and paper full in an additional amount of 100 acre-feet.

Additionally, this requirement that a reservoir remains paper full also applies to releases of storage rights that have been made absolute only by virtue of their storage, as allowed by 37-92-301(4)(e). For example, consider a reservoir decreed for 1,000 acre-feet of storage for municipal uses under a senior storage right and for an additional 1,000 acre-feet of storage for municipal uses under a junior refill right. The senior right has 500 acre-feet of storage that has been made absolute and 500 acre-feet of storage remains conditional. The entire junior refill right is conditional. In one year, the reservoir fills to 1,000 acre-feet and makes the conditional 500 acre-feet of the senior right absolute, as allowed by 37-92-301(4)(e). With no immediate use for that 500 acre-feet of stored water that was made absolute, the reservoir releases it and then fills again under the junior right. The reservoir will be considered physically full in the amount of 500 acre-feet and paper full under the senior right in an additional amount of the released 500 acre-feet until such time as an amount of storage water greater than the 500 acre-feet previously made absolute is put to a decreed beneficial use. This applies to refill rights as well. That is, when rather than a conditional junior right, the right is a conditional *refill* right.

In this example 6, the paper fill remains not only throughout the entire fill season but through subsequent seasons until such time as the reservoir can physically fill the paper fill amount under free river or futile call conditions.

For on-stream reservoirs, if there is no diversion and storage, a paper fill is charged at the rate of storable inflow to the reservoir. For off-stream reservoirs, the paper fill of the senior right is charged at the rate at which the user could have legally and physically filled under the senior right. For example assume the following:

- a. there is 400 cfs stream flow at the headgate of the feeder ditch for off-stream reservoir A
- b. reservoir A is empty
- c. reservoir A has a fill right for 300 cfs that is in priority
- d. the capacity of the ditch to fill reservoir A is 250 cfs
- e. the reservoir operator is diverting 200 cfs

Under these conditions, the reservoir would be paper filled at the rate of 50 cfs or approximately 100 acre-feet per day. If an off-stream reservoir is physically full due to storage of foreign water, for example, the rate of paper fill does not occur instantaneously but at a rate that is available at the reservoir from the decreed source of supply. However, if the user does not track the necessary information, then the reservoir is paper filled immediately.

Examples of where the Division Engineer has the discretion to not impose a paper fill:

There are times when water will not be counted as storable inflow and used to paper fill a reservoir. Examples of when water will not be counted as storable inflow and used to paper fill a reservoir are when the owner of the water right releases water or bypasses storable inflow for any of the following reasons:


1. the reservoir is under an order from the State Engineer due to a storage restriction,
2. there is a legitimate need to dredge the reservoir,
3. there is a legitimate need to repair and maintain feeder ditches,
4. there is a legitimate need to perform maintenance on outlet works,
5. when winter icing prevents the reservoir operator from impounding and controlling the inflow,
6. there is a legitimate need to bypass water of poor quality,
7. to accommodate other necessary activities at the discretion of the Division Engineer, with consideration of the severity of the need.

In each of these situations, upon approval of the Division Engineer the reservoir will not be subject to a paper fill. In addition to the examples above, "paper fill" is also used in applying the out-of-priority storage statute, as discussed in the following section.

Out of priority Upstream Storage Statute

As early as 1924, State Engineer Hinderlader allowed upstream reservoirs to fill “as early as possible and depend, to some extent, on the return flow to complete the filling of the reservoirs farther down the river.”⁵ In 1969, the General Assembly codified this longstanding practice in what is now C.R.S. § 37-80-120. Presently, on the South Platte, out of priority upstream storage may occur against a storage water right only in accordance with a plan approved by the Division Engineer.⁶ To date, no one has been given approval of such a plan. While other Divisions have not adopted a formal process, some of the considerations that would be taken into account prior to allowing out of priority storage are spelled out in the example below.

Assume structures A and B are reservoirs (owned and operated by different entities) with storage rights and structures C and D are ditches with direct flow rights. All structures are situated on the river as shown below:

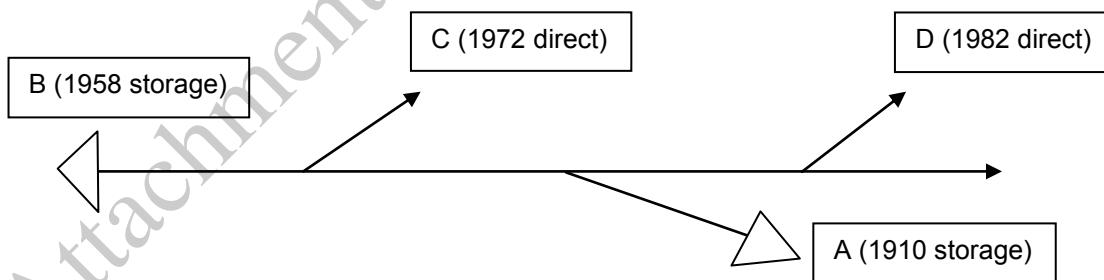

In our example, Reservoir A has a decreed and physical capacity of 1,000 acre-feet and has the senior right (1910) on the river, and Reservoir B has a decreed and physical capacity of 200 acre-feet and a 1958 right. Assume that as of March 1, Reservoir A has

⁵ Letter from M.C. Hinderlader, State Engineer, to W.B. Gaumer, President, Farmers Reservoir & Irrigation Co. dated November 17, 1924. Please see Appendix for document.

⁶ Letters from James R. Hall, Division Engineer, to Division 1 Water Users dated October 6, 2005 and July 27, 2006 regarding South Platte Non-Irrigation Season Administration. Please see Appendix for documents.

diverted 820 acre-feet into storage, and that Reservoir B has been allowed (by approval of the Division Engineer) to divert 200 acre-feet into storage even though its right is junior to Reservoir A's right and Reservoir A has not yet filled (i.e. Reservoir B has stored 200 acre-feet out of priority). If the transit losses to Reservoir A from Reservoir B are 20 acre-feet, then Reservoir A is paper filled to 1,000 acre-feet and no longer able to place a call. At this point, Ditch C would be in priority and thus could divert water and make a call if necessary. Likewise, Ditch D would be entitled to make a call curtailing the diversion of Reservoir A.

Reservoir A would only be allowed to divert additional water to storage under free river conditions. As for Reservoir B, it could continue to divert water under its 1958 water right while at the same time releasing the out of priority water stored and delivering it past Ditch C to Reservoir A even if ditches C or D placed a call. This water then replaces Reservoir A's paper fill with actual water and decreases the risk to Reservoir B that it will be required to release its water to Reservoir A later in the season when it is no longer able to store water under its 1958 priority. In a situation where more than one reservoir is storing out of priority upstream of Reservoir A, all upstream out of priority storage must be aggregated to determine when Reservoir A is paper full.

Administration of the upstream storage statute is further complicated by the requirement to account for any seasonal transit loss changes within the reach from the junior to the senior reservoir and within the feeder ditches of the senior reservoir between the time of out of priority storage and the time the water is released to the senior reservoir. The junior reservoir storing out of priority is responsible for payment of

any increase in transit losses should the senior reservoir not fill assuring the senior reservoir receives the full amount to which they were paper filled.

Due to these complexities required to assure non-injury when storing out of priority, upstream out of priority storage is typically not allowed. In some cases, however, out of priority upstream storage is unavoidable. For example, winter conditions may prevent access to some small high mountain reservoirs for real time operation and may prevent real time measurement of winter inflows due to inaccurate measurements caused by ice cover.

Evaporation

Reservoirs are categorized based on their location from a natural stream as either on-channel or off-channel. When a reservoir is constructed on a natural stream bed (on-channel) it causes an increase in losses to the stream system due to the increase in free water surface area of the stream. When an on-channel reservoir is in-priority and filling, the operator does not have to pay back the stream for this increased loss. However when the reservoir is not filling in priority, the operator is required to release stored water to offset the amount of this increased loss to assure that the total natural flow is passed through the reservoir as if the reservoir did not exist. Usually, the release for this loss is accomplished by lowering the reservoir stage to correspond to the calculated net depletion amount. If daily administration is not practical because of the limited size of a reservoir surface, releases for this loss are often aggregated and made on a monthly rather than daily basis. If more than one water right is in a reservoir or the reservoir contains foreign water, the reservoir owner may specify which type(s) of water to release to account for evaporation.

When predicting the amount of future evaporation to be covered by an on-channel reservoir, the average gross evaporation (free water surface) must be calculated based upon average evaporation atlases in NOAA Technical Report NWS 33⁷ and the maximum surface area of the reservoir (unless otherwise decreed). The total gross evaporation estimate from NOAA shall be distributed to all months. The monthly distribution for elevations below 6500 feet msl is: Jan-3.0%, Feb-3.5%, Mar-5.5%, Apr-9.0%, May-12.0%, Jun-14.5%, Jul-15.0%, Aug-13.5%, Sep-10.0%, Oct-7.0%, Nov-4.0%, and Dec-3.0%. The monthly distribution for elevations above 6500 feet msl is: Jan-1.0%, Feb-3.0%, Mar-6.0%, Apr-9.0%, May-12.5%, Jun-15.5%, Jul-16.0%, Aug-13.0%, Sep-11.0%, Oct-7.5%, Nov-4.0%, and Dec-1.5%.⁸

When determining the actual evaporation based on the actual surface area of the reservoir, more site-specific information, if available, may be used or may be required depending upon decree conditions, size of reservoir, impact of reservoir evaporation on other users, and/or availability of data. Any site-specific estimate is subject to evaluation and must be approved by the Division Engineer before use. During times when site-specific instrumentation goes down, NOAA values must be used until the instrumentation is operating again. NOAA values must also be used if site-specific instrumentation is inaccurate, has not been approved by the Division Engineer, or does not exist.

For months during which the surface is completely covered with ice during the entire month, the gross evaporation may be calculated as zero for that month, without

⁷ Farnsworth, Richard K., Edwin S. Thompson, and Eugene L. Peck. 1982. *Evaporation Atlas for the Contiguous 48 United States*. NOAA Technical Release NWS 33. U.S. Department of Commerce, National Oceanic and Atmospheric Administration, National Weather Service.

⁸ State Engineer's "Policy 2003-2: Implementation of Section 37-92-308, C.R.S. (2003) Regarding Substitute Water Supply Plans" signed August 12, 2003 by Hal D. Simpson
<http://water.state.co.us/DWRIPub/Documents/policy2003-2.pdf>

redistributing that month's percentage into the remaining months of the year. The applicant may prorate the estimated evaporation for months during which the surface is covered with ice over a portion of the surface and/or during a portion of the month. The user must provide evidence of ice cover for that month. For projection purposes only, the ice cover period may be estimated as that period during which the mean air temperature is below 32 degrees Fahrenheit. The Division Engineer, however, will assess actual losses based on actual conditions.

The gross amount of evaporation can be offset for on-stream reservoirs by any evaporation from previously existing free water surfaces, effective precipitation that would have been consumed by any native vegetation, and/or groundwater consumption due to any native phreatophytes. Essentially, statute allows on-stream reservoir owners the right to reduce their required evaporation releases for any natural depletion to the stream that would have occurred if the reservoir were not in existence (37-84-117 (5) C.R.S.). An analysis of the pre-existing conditions must be performed to determine what reduction to the gross amount of evaporation will be allowed. In addition, a user may be required to keep track of actual site-specific precipitation in determining the reduction to the gross amount of evaporation for large reservoirs. Typically, the SEO has assumed for a native site (without phreatophytes) with a deep ground water table that 70% of the total precipitation is either consumed or goes to soil moisture storage.⁹

Seepage

As soon as water stored in a reservoir or in the process of being delivered by a ditch seeps through the bottom or sides of the structure, it is considered waters of the

⁹ Wolfe, Dick and Richard L. Stenzel. 1995. "Evaporation." *Evapotranspiration and Irrigation Efficiency*. Proceedings of the 1995 Seminar held in Arvada, CO on October 10-11, 1995. Please see Appendix for document.

state subject to the prior appropriation doctrine. This applies to water that cannot be “re-used” as well as fully-consumable water that is no longer under the dominion and control of the user. A reservoir owner may not recapture seepage water from a reservoir as part of the original storage right unless specifically allowed by decree and may not recapture fully consumable water without dominion and control accounting approved by the division engineer. An appropriator of seepage water cannot require or demand that the seepage continue as the reservoir or ditch owner is generally allowed to make improvements that may eliminate or reduce the seepage.

Absent a specific decreed appropriation to the contrary, water flowing from the toe drain of a dam associated with a reservoir is considered “seepage”. Toe drain outlets must drain freely without restriction to protect the dam and must be discharged without use and separate from the measured release from the reservoir. Structures oriented such that the toe drain flow cannot be separated from the measured reservoir release must quantify the toe drain flow in a manner approved by the division engineer and must subtract the toe drain flow from the measured, comingled release. Toe drain flow from on-stream reservoir dams may be counted as an “accretion to the stream flow resulting from the existence of a reservoir” that is used to offset evaporative losses in accordance with §37-84-117 (5), C.R.S. provided the user relinquishes all dominion and control over the released toe drain flow.

Volumetric versus Gage Height Decrees

The amount of storage water could be defined in a decree as a specific volume or up to a specific gage height in the reservoir. A “volumetric” decree is filled once the total volume of water as measured into the reservoir (plus any carryover and paper fill

volume) reaches the decreed amount or physical amount, whichever is less. A "gage height" decree is filled once the level in the reservoir (plus any paper fill amount) reaches the decreed gage height. The difference between gage height and volumetric decrees is that while filling under these two types of rights, evaporation and seepage does not count against the gage height decree but does count against the volumetric decree. (Seepage may or may not count against an on-stream volumetric decree depending on how the inflow is determined.) Once a gage height decree is filled, however, it is then treated just like storage under a volumetric decree for an off-channel reservoir where the storage in the reservoir suffers evaporative and seepage losses. Absent a refill right, foreign water or free river conditions the additional space created by these losses cannot be replaced.

It is important to have a good stage-capacity curve even for reservoirs with gage height decrees. If the reservoir is curtailed due to a call prior to being filled, the stage-capacity curve can be used to determine how much water the reservoir still has under its water right should it come back into priority. If the gage-height decree comes back into priority, it can continue to fill up to the volume associated with the difference between the gage height when it was curtailed and the completely full gage height.

The following is an example of a gage-height decree for Julesburg Reservoir decreed in civil action no. 944:

It is therefore Adjudged and Decreed, that the said Julesburg reservoir be allowed to have stored in it from the South Platte river by means of the Harmony ditch No. 1, as enlarged and extended as a feeder to said reservoir, and for the benefit of the party or parties aforesaid under and by virtue of said appropriation by construction No. 1, so much water as is necessary to fill said reservoir to a depth of forty-seven (47) feet above the bottom of the lower discharge conduit from said reservoir, being an estimated capacity of one billion two hundred and twenty-seven million

four hundred and forty-five thousand cubic feet, which appropriation of water for said storage purposes and other beneficial uses took effect on and dates from the 12th day of February, 1904.

The gage height of 47 feet above the bottom of the lower discharge conduit dictates when this reservoir has reached its one fill under this right despite the decree giving an estimated volume associated with this gage height.

Transit (Conveyance) Losses

Transit losses are losses to the stream due to seepage, stream evaporation, or plant consumption. The General Assembly requires the State Engineer to determine and charge transit losses (also referred to as "conveyance losses") for the delivery of water released from storage. Transit losses vary depending upon channel size, elevation, stream gradient, vegetation, bank storage, time of year, location, distance, and other factors.

Exchanges

In an exchange, water is generally provided at one point on a stream so that it may be diverted out of priority at another point upstream. Reservoirs may be part of exchanges. Some examples of possible exchanges that involve reservoirs include:

- release from a downstream reservoir in exchange for diversion into an upstream reservoir
- release of reusable effluent from a downstream treatment plant in exchange for diversion into an upstream reservoir
- release from a downstream reservoir in exchange for diversions into an upstream ditch

- consumptive use credits from a downstream changed direct right are left in the stream to replace water diverted in an upstream reservoir

As with all exchanges, the exchange must be approved by the Water Commissioner or Division Engineer and the release downstream timed so that the flow will be the same as if the upstream diversion had not taken place. Further, when a water right holder releases water allowing an upstream diversion by exchange, the diverted water takes on the “character” of the released water. For example, the water stored in a reservoir in exchange for the release of reusable water from a treatment plant would “take on the character” of the reusable effluent and the water released from the treatment plant becomes the same character as the water that was physically stored in the reservoir (either natural stream or delivery water).

Temporary Detention (72-Hour Rule)

Direct water rights may be temporarily detained for up to 72 hours in order to allow more efficient or effective beneficial use of the water. Examples of such detention would be ponds used to receive delivery of a direct flow irrigation water right that is then applied by a sprinkler or temporarily detained and slugged out through a ditch (operational, head stabilization, equalization or flow regulating ponds), or the use of forebays or regulating structures associated with municipal operations. A specific storage right generally will not be required as long as the water is held for less than 72 hours and the detention is for purposes of allowing for more efficient or effective beneficial use of the direct water right. Absent a storage right, free river conditions, or the use of a *Post Wildland Fire Facility*, as addressed by SB15-212 (section 37-92-602(8), C.R.S.), all water, including storm water, must be released within 72 hours.

Ponds that intercept ground water are subject to additional limitations and all dams associated with the construction of ponds must comply with all requirements of the State of Colorado's Dam Safety Rules and Regulations.

If storm water is not diverted or captured in priority, by exchange or under a substitute water supply plan or decreed plan for augmentation, Colorado Water Law requires it to be released. The State Engineer's current policy requires that all detained water be released to the stream system within a maximum of 72 hours after detainment.

Surcharge Storage

Surcharge storage means the volume of water that may be impounded but not retained within a reservoir between the normal spillway and the crest of the dam. This surcharge is not considered part of the reservoir fill under the water right. The reason for this is that the reservoir operator does not control water in surcharge and by definition in CRS 37-92-103(10.8) storage is the impoundment, possession, and control of water by means of a dam. Unless free river conditions exist or an exchange is made to "recolor" (or change the character of) this water, surcharge storage must be released within 72 hours. Operation of the reservoir outlet works may be required in order to release the surcharge within 72 hours.

Adequate Measurements

In cases where the reservoir right is limited to gage height, it is important that a staff gage that is easily readable be installed in the reservoir. A stage-capacity table (a table that reflects the capacity or volume of storage in the reservoir based on the stage or elevation of the water in the reservoir) has also usually been developed in conjunction with obtaining an absolute right for the reservoir. As long as the decree for

the reservoir covers complete filling of the reservoir and no other water is stored in the reservoir when the reservoir reaches the full level as measured on the elevation/staff gage, then the reservoir is considered full under that right. See additional information above in the Volumetric versus Gage Height Decrees section.

Measuring inflow with a decree specifying a staff gage height is more difficult when releases are being made at the same time that water is being stored. In this situation, a reservoir operator may be required to measure via gages all inflow to and outflow from the reservoir to determine the storage under the right. Alternatively, the Division Engineer or Water Commissioner may allow the use of a "computed inflow." In computing inflow, reservoir operators measure the outflow and the change in storage (as measured by the staff gage) over the same period of time and account for net surface water evaporative losses. This method accounts for all inflow, including underflow, unmeasured tributaries, and precipitation on the reservoir's surface.

In cases where the amount of storage allowed is limited to a volume and not a specific gage height (volumetric decrees), an accurate measure of all inflow is generally necessary. This is done by use of a flume or a weir with a continuous recorder. For volumetric decrees, losses due to evaporation or seepage from the reservoir cannot be made up under the storage right.

Recording is often midnight to midnight, but historical and pragmatic practice may allow recording to be 8am to 8am or another 24-hour period. Reservoir operators must report this recorded information as required by the Division Engineer. Reporting requirements may vary depending on the time of year.

Accounting Principles

Accounting requirements differ depending on the administrative requirements of a reservoir. In simple situations, no independent accounting from the user would be required when the reservoir can be administered without such accounting. The reservoir is simply considered full when it reaches its decreed limit after accounting for carryover. For more detail see section Decree versus Physical Capacity above (as described separately in this document). In these cases, the only record is often the Water Commissioner's record of diversions and storage contents.

Accounting does become necessary when a reservoir goes into and out of priority prior to being filled or the user is releasing water prior to being filled. As described earlier, accounting is also required if there is more than one storage decree associated with a reservoir (especially if the decrees are for different purposes) or foreign water is stored in a reservoir. In the case of more than one storage decree for different uses or places of use, the user may keep track of each type of water in the reservoir independently. If the user does not provide accounting, all carryover is charged to the senior most right as discussed earlier (except when the first-in first-out principal is applied) and takes on the character of the senior right.

In some cases, a reservoir has been designated as an alternate place of storage for another storage right. In this case, the user must keep track of the different types of water in the reservoir. If a particular right is stored in more than one reservoir (either as an alternate place of storage or relocated to other reservoirs), then the user must account for storage under this right in all reservoirs so as to document compliance with the decree(s).

Administrative Accounts (Owe-The-River Account)

It is sometimes necessary to use water balance type accounting when it is difficult to directly measure all of the inflow into an on-stream reservoir. With water balance accounting, the inflow is determined by measuring outflow (including releases and evaporation) and change in storage during the day. The determination of inflow is a day in arrears because of the dependence on change in storage information. An administrative account is used to keep track of “errors” in release amounts because of not knowing the inflow until a day late. For example, assume the following:

- a. Reservoir A is on stream and cannot store because it is out of priority.
- b. The users are releasing 10 cfs (approximately 20 acre-feet/day) from storage in the reservoir for use.
- c. The Division Engineer or Water Commissioner is releasing an additional 5 cfs (approximately 10 acre-feet/day) as that is the assumed natural inflow to the reservoir.
- d. The net evaporation from reservoir A is 1 cfs (approximately 2 acre-feet/day).
- e. The reservoir declines approximately 20 acre-feet between day 1 and day

On day 2, the Division Engineer/Water Commissioner and/or user will use water balance accounting to determine that the actual inflow between day 1 and day 2 was approximately 12 acre-feet ($\text{Inflow} = \text{Releases} (30) + \text{Evaporation} (2) + \text{Change In Storage} (-20)$) or 6 cfs rather than the estimated 5 cfs. In this case, an administrative account or “owe the river account” would be approximately 2 acre-feet. The Division Engineer/Water Commissioner would adjust the release on day 2 to attempt to continue

to release natural inflow plus release the 2 acre-feet in the “owe-the-river” account. The same steps would be taken each day to adjust for either too high or too low an estimate of the actual inflow each day and to keep the administrative account as near to zero over time as possible.

Enforcement Principles

Installation of Measurement Device or Reporting Orders

Generally, the Division Engineer or Water Commissioner verbally directs reservoir users concerning the measurement devices and reporting necessary to administer reservoir rights. In accordance with 37-92-502 (5) (a), C.R.S., the State Engineer and the Division Engineers also have formal authority to order any owner or user of a water right to install and maintain at such owner's or user's expense necessary meters, gauges, or other measuring devices and to report at reasonable times to the appropriate Division Engineer the readings of such meters, gauges, or other measuring devices. Users are subject to liability for impacts to other users from improper storage and subject to paying legal fees and costs of the State in enforcement efforts associated with measuring devices and reporting.

Storage Release Orders

In most situations, the Water Commissioner or Division Engineer informally directs a user to release water stored improperly or directs the user to provide information on why they should be able to retain water when it appears they have stored out of priority. However, if necessary, the Division Engineer can formally order the release of any water that the Division Engineer finds to have been illegally or improperly

stored in accordance with 37-92-502 (3), C.R.S. The Division Engineer is directed to deliver this water to users who are entitled to the same and to insure that the release will not cause damage. Users are subject to liability for impacts to other users from improper storage and subject to paying legal fees and costs of the State in such circumstances. In addition to other orders discussed in these guidelines, the Division Engineer may order removal of any obstruction in a river if it impacts water rights.

Attachment to Order - 2016CW519

ADDITIONAL INFORMATION

Dam Safety Restriction and Breach Orders

The State Engineer's staff inspects reservoirs within the state to determine their safe storage level. When necessary, the State Engineer will issue a restriction order to limit the user from storing above this safe storage level (see Rule 4.2.29 of the [Dam Safety Rules](#)). The Division Engineer will order the release of water in the reservoir if it exceeds the restricted level.

A breach order is an order issued by the State Engineer, or his designee, to remove all or part of a dam to the level of the natural ground, so it is incapable of impounding water and creating a hazard (see Rule 4.2.3 of the [Dam Safety Rules](#)).

Dead/Active Storage

Active storage is that volume of water capable of being released from the reservoir by means of gravity through an outlet of the reservoir. Dead storage is that amount of water that cannot be released without pumping because of the location and elevation of the lowest outlet from the reservoir. A user may be required to pump dead storage water out of a reservoir into the stream to replace evaporation losses or out of priority inflows into the reservoir. The SEO may oppose the use of small ponds with dead storage as an augmentation source in an augmentation plan due to the unreliability and inadequacy of these structures.

Underground Storage

Placing water into underground storage has a number of advantages that achieve the legislature's objective to maximize the beneficial use of all of the State's waters. For example, water stored underground is not lost to evaporation; the water can be used as an emergency supply in the event of disruption to surface water systems; storing water in an aquifer raises the water table and can reduce energy demand and energy costs otherwise needed for well pumping; and storing water underground helps to reduce committing additional surface land to additional large reservoirs, conveyance systems, and stream modifications.

Underground reservoirs are not reservoirs within the meaning of C.R.S. 37-87-101(2) except to the extent such reservoirs are filled by other than natural means with water to which the person filling such aquifer has a conditional or decreed right. Recharge water rights are not considered storage. Underground reservoirs also include porosity storage reservoirs which are defined as underground storage vessels in an alluvial deposit over an aquiclude that is formed by separating a volume of that alluvial deposit by surrounding it by a man-made substantially impermeable barrier so that the volume is hydrologically separate from the original surrounding deposit.

Subgrade Storage

Subgrade storage includes any water stored below the natural land surface elevation such that it must be accessed by means other than gravity drainage. This includes rock quarries in low permeability material, but generally is associated with placing a very low permeability lining around a mined-out gravel pit or other excavation

into high permeability material. The purpose of the very low permeability liner is to isolate the water placed into the excavation from the surrounding ground water, thus impounding, possessing, and controlling the water, rather than letting it flow away with the surrounding ground water and become unavailable for future use.

The very low permeability liner must be approved in accordance with the August 1999 State Engineer Guidelines for Lining Criteria for Gravel Pits (please see Appendix for document). The Liner Guidelines contain a procedure for testing the constructed liner, two allowable liner leakage standards, a mass balance accounting procedure for lined excavations, and provisions to address a liner failure that may occur during operation of the reservoir.

The testing procedure set forth in the Liner Guidelines requires that the liner be demonstrated to meet leakage standards. Typically this is done by holding the lined excavation essentially dry; measuring the volume of water removed from the lined excavation; and calculating the volume of any precipitation entering the lined excavation based on the surface area and a simple on-site rain gage correlated to official weather stations in the area. If the lined excavation is not held essentially dry during the test, the volume of evaporation from the free water surface must also be calculated based on the surface area over the course of the test and data from official weather stations in the area. The differences between the known inflows and the known outflows plus any changes in storage are assumed to be ground water leakage by the liner. If this volume does not meet the leakage standards in the Liner Guidelines then the excavation is determined to be a well and water storage is not allowed.

It should be noted that the Liner Guidelines contain a similar testing procedure as discussed above for locations of high permeability material where a slurry wall has been installed to isolate an area from the local ground water but where no excavation has yet occurred. The procedure here requires piezometers located inside and outside of the slurry wall to monitor water levels on both sides of the wall. Water is then pumped from inside the wall to establish a steady-state head gradient across the wall for the 90 day test. The minimum acceptable head gradient prior to starting the test is ten (10) vertical feet or to bedrock if bedrock is located less than ten feet below the local water table. The same leakage standards used for an excavated area are also used in this instance.

The mass balance accounting procedure set forth in the Liner Guidelines is straightforward and requires any out of priority inflow from any source, including ground water, to be returned to the stream or fully augmented. The Liner Guidelines provision to address a liner failure that may occur during operation of the reservoir requires that if, in two consecutive months, the accounting shows the unregulated ground water inflows exceed the Guideline Standards, the reservoir operator and the State Engineer's Office will consult on the probable cause(s) and possible solution(s) to the excessive inflows. Specific operational requirements and time lines for agreement and repair are also set forth in the Liner Guidelines. The ultimate result of a previously approved liner failing to meet the Guideline Standards during actual operation is a prohibition of storage in the reservoir with a requirement that all out of priority inflows be pumped to the stream or fully augmented pursuant to an augmentation plan or a substitute water supply plan.

Rock quarries in low permeability material that seek to store water are tested in accordance with the Liner Guidelines discussed above as applied to lined excavations

into high permeability material where the excavation intercepts ground water. They are also subject to the same two tiered accounting approach discussed above.

Types of Dams

Colorado laws governing dams and reservoirs were enacted for the protection of lives and property due to potential hazards associated with the storage of water in the reservoir behind a dam. The owner of the dam is responsible for the safe storage of water impounded in the reservoir. There are specific construction and administration requirements depending on the category of a dam. The categories are as follows: jurisdictional size dams, non-jurisdictional size dams, livestock water tanks (LSWT), erosion control dams (ECD) and exempt structures such as mill tailing impoundments (see complete list of these structures in Section 37-87-114(5) C.R.S.). Laws that are contained in the Colorado Revised Statutes establish specific requirements for each type of dam. Jurisdictional and non-jurisdictional size dams, exempt structures, and ECDs are governed by Sections 37-87-101 thru 125, C.R.S. and the [Rules and Regulations for Dam Safety and Dam Construction](#). LSWTs are regulated by Sections 35-49-101 thru 116, C.R.S. The owner of a dam and/or irrigation ditch has responsibilities, and the Division Engineer in charge of each Water Division has additional related authorities, under the following statutes: C.R.S 37-84 inclusive and 37-92 inclusive.

Constructing a dam to create a reservoir does not assure the owner the right to store water. Likewise, having a water right does not constitute an approval to construct the dam. A water right must be obtained through the Water Court. Approval for construction of a dam must be obtained from the State Engineer.

Jurisdictional versus Non-jurisdictional

A jurisdictional dam is one that has a statutory height of greater than 10 feet in height to the spillway crest from the lowest point in the natural stream channel or natural ground surface, or creates a reservoir with more than 100 acre-feet of water, or covers a surface area of more than 20 acres at the high waterline. Plans and specifications for jurisdictional dams must be approved by the State Engineer before construction. The "Rules and Regulations for Dam Safety and Dam Construction" can be accessed from the following website link: http://water.state.co.us/DWRIPub/Documents/ds_rules07.pdf.

Additionally, you can obtain a publication from this office free of charge titled, "Guide to Construction and Administration of Dams in Colorado" (or you can download it at the following link: <http://water.state.co.us/DWRIPub/Documents/damguide.pdf>), which is helpful in providing general information regarding dams, livestock water tanks, and erosion control dams.

A flood control dam is a special purpose dam which is normally dry and has an un-gated outlet structure which will drain the water impounded during the flood. The jurisdictional size and classification of the dam are determined assuming the reservoir is full to the emergency spillway (see Rule 4.2.5.7 of the [Dam Safety Rules](#)).

Non-Jurisdictional size dams are smaller in size than jurisdictional size dams. Plans and specifications are not required for construction, however, filing of a Notice of Intent to Construct a Non-Jurisdictional Water Impoundment Structure is required. The form may be obtained from the Office of the State Engineer in Denver, from any Water Division office, or from the DWR website

<http://www.water.state.co.us/DWRDocs/Forms/Pages/DamForms.aspx>, and must be

filed 45 days prior to construction. No fee is required to file the Notice of Intent form.

The Division Engineer may require an outlet pipe with a regulating gate to be installed in the bottom of the dam to allow releases to prevent injury to existing water rights.

Because any dam, regardless of size, has the potential to cause damage downstream if it should fail, the owner is advised to consult a person familiar with dam construction to ensure the dam is constructed properly. The Notice of Intent form shall be submitted to the Division Engineer of the Water Division in which the dam is to be located.

Addresses of the seven division offices are available online at

<http://www.water.state.co.us/org/contacts.asp>.

Livestock Water Tanks

Livestock water tanks are covered under the "Livestock Water Tank Act of Colorado" Sections 35-49-101 to 35-49-116, C.R.S. (Also see Rule 17.4 of the [Dam Safety Rules](#).) A LSWT requires a permit from the State Engineer. A LSWT is a dam constructed to capture run-off water on rangeland to provide water for livestock. They may only be constructed on normally dry water courses, and may also be used for recreation, but not for irrigation. A normally dry water course or stream is considered dry 80% of the time during a calendar year. The structure must not have a ditch or other structure delivering water to or from it.

Height of the dam cannot be greater than 15 feet from the bottom of the stream channel to the spillway crest. Impoundment volume of the reservoir cannot exceed 10 acre-feet. If the LSWT is five feet or less in height to the spillway, and two acre-feet capacity or less, no application is necessary, but an application may be filed to obtain a priority between LSWT's. It is important to note that this is not a water right, but only

provides a priority between LSWT's. The LSWT does not require a water right for its use but may be subject to curtailment from downstream senior users depending on the specific circumstances.

An outlet pipe with a regulation gate is required unless specifically waived by the Division Engineer during review of the application. Standard specifications and application forms are available from any Water Division office or the DWR website <http://www.water.state.co.us/DWRDocs/Forms/Pages/DamForms.aspx>. The application and fee should be submitted to the division office that the LSWT is to be located in. Construction of the LSWT may begin upon approval of the application by the Division Engineer. The State Engineer may then inspect the LSWT and within 10 days after receiving notice of completion or within 10 days after inspection he must then approve or disapprove of the structure. The U.S. Natural Resources Conservation Service may assist owners in preparing an application, or owners may wish to hire a licensed professional engineer experienced in dam design for assistance.

Erosion Control Dams

In Colorado, many farms and ranches need ways to control erosion. In recognition of this need, the Colorado legislature instituted statutes governing the development and use of these types of structures. Erosion control dams are governed under Section 37-87-122, C.R.S. (Also see Rule 17.5 of the [Dam Safety Rules](#).)

An ECD requires a permit from the Office of the State Engineer. These dams may only be constructed on normally dry watercourses and are only for the purpose of controlling soil erosion caused by floods. The vertical height of the dam cannot exceed 15 feet from the bottom of the channel to the bottom of the spillway. The height is

measured at the toe of the upstream slope where the dam contacts the ground surface. The spillway must have a minimum freeboard of four feet to the dam crest. Impoundment volume of the reservoir cannot exceed 10 acre-feet at the emergency spillway level. An ECD with more than two acre-feet capacity must have an un-gated outlet conduit large enough to pass stored water in excess of two acre-feet within a 36-hour period, but no less than a 12-inch diameter. The vertical location of the outlet must be at or below the two acre-feet storage volume level. In certain circumstances, an outlet structure may be required for an ECD with less than two acre-feet capacity to address water administration issues.

A water right is not required for an ECD but a number is assigned, similar to a LSWT. An ECD is also subject to curtailment from downstream water rights depending upon the circumstances. Since an ECD is not intended to store water, a priority is not assigned. Standard specifications and application forms are available from any Water Division office or the DWR website

<http://www.water.state.co.us/DWRDocs/Forms/Pages/DamForms.aspx>. The application, along with a fee, must be submitted to the Water Division office. Construction may begin upon approval of the application by the Division Engineer. The U.S. Natural Resources Conservation Service may assist owners in preparing an application, or owners may wish to hire a licensed professional engineer for assistance.

Other Regulatory Requirements

Other state and federal agencies regulate runoff from storm water in construction activities, industrial activities and concentrated animal feeding operations. These facilities may involve temporary or permanent detention, retention, or sediment ponds or


basins. These structures are designed to capture, settle, store and/or release water. These structures can be constructed by excavation and/or by placing an earthen embankment across a low area or drainage swale. They can be designed to maintain a permanent pool or to drain completely dry.

The two agencies that regulate these activities are the Colorado Department of Public Health and Environment, Water Quality Control Division <http://www.cdphe.state.co.us/wq/PermitsUnit/> and the Environmental Protection Agency <http://www.epa.gov/region8/water/stormwater/>. Even though these structures are permitted and regulated by these other agencies they must still comply with all State water rights laws regarding diversion and depletion of surface water.

Compensatory Storage Doctrine (Transbasin Storage Agreements)

The cost of constructing and operating large projects precluded all but the largest municipalities. To provide a means to finance, acquire water rights and land surface rights, and for operations, the Colorado legislature created special statutory entities called water conservancy districts. The first of these districts was the Northern Colorado Water Conservancy District, created in 1937 to develop the Colorado-Big Thompson Project. Recognition of compensatory storage as an integral part of transmountain diversions by way of water conservancy districts came in 1943 when the Colorado legislature amended the original Water Conservancy Districts Act to require facilities to be constructed so as not to impair nor increase costs to existing or prospective water users within the natural basin of the Colorado River. Three reservoirs

have been built in the Colorado River drainage as a result of this act. The Colorado-Big Thompson Project built Green Mountain Reservoir with a capacity of 152,000 acre feet in return for the right to divert an expected 320,000 acre feet to the South Platte drainage. Of the 152,000 acre feet, 100,000 acre feet is in the compensatory pool for the benefit of in-basin users. These beneficiaries receive replacement releases either by the language of the authorizing legislation of the project or by contract. This authorizing legislation for the CBT, Senate Document 80, became the model for compensatory storage. The Fry-Ark Project built Ruedi Reservoir with a capacity of 102,000 acre feet in return for the right to divert an expected 69,200 acre feet to the Arkansas River drainage. An individual beneficiary of this compensatory pool obtains release of stored water by contract. The Windy Gap project provided \$10M for the construction of compensatory storage, which ultimately helped build Wolford Mountain Reservoir, and the first 3,000 acre feet of Windy Gap water pumped to Granby Reservoir. Municipalities, irrigation companies, and other corporations that construct transmountain diversion projects are not required to provide compensatory storage because they are not incorporated or created under the statute requiring such storage.

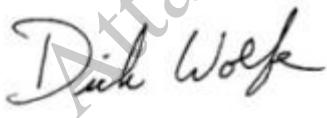

Dick Wolfe, P.E.
State Engineer, Director
Colorado Division of Water Resources
October 31, 2011
Revised: February 1, 2016

Revision Log

- Original Document – October 2011
- Amended – February 2016
 - Additional direction to address activities allowed under SB13-41
 - Additional direction regarding paper fill
 - Miscellaneous, non-substantive, clarifying cleanup

Attachment to Order - 2016CW3119

RINN VALLEY - PHASE 1C AREA-CAPACITY & ELEVATION		
CONTOUR ELEVATION (FEET)	AREA (ACRES)	CUMULATIVE VOLUME (ACRE-FOOT)
4,828.4	0.0	0.0
4,829.0	0.0	0.0
4,830.0	0.1	0.0
4,831.0	0.2	0.2
4,832.0	0.7	0.6
4,833.0	1.5	1.6
4,834.0	3.3	4.0
4,835.0	5.1	8.2
4,836.0	8.4	14.8
4,837.0	11.9	25.0
4,838.0	15.0	38.6
4,839.0	16.2	54.3
4,840.0	17.4	71.0
4,841.0	18.8	89.2
4,842.0	19.4	108.3
4,843.0	19.8	127.9
4,844.0	20.1	147.8
4,845.0	20.4	168.1
4,846.0	20.6	188.6
4,847.0	20.9	209.3
4,848.0	21.2	230.4
4,849.0	21.5	251.7
4,850.0	21.7	273.3
4,851.0	22.0	295.2
4,852.0	22.3	317.3
4,853.0	22.6	339.8
4,854.0	22.9	362.5
4,855.0	23.1	385.5
4,856.0	23.4	408.7
4,857.0	23.7	432.3
4,858.0	24.0	456.2
4,859.0	24.3	480.3
4,860.0	24.6	504.8
4,861.0	24.9	529.5
4,861.5	25.2	542.0

DATE FILED: January 24, 2019 2:03 PM

RINN VALLEY - PHASE 2		
AREA-CAPACITY & ELEVATION		
CONTOUR ELEVATION (FEET)	AREA (ACRES)	CUMULATIVE VOLUME (ACRE-FOOT)
4,829.4	0.0	0.0
4,830.0	0.0	0.0
4,831.0	0.3	0.1
4,832.0	0.8	0.6
4,833.0	1.5	1.7
4,834.0	2.3	3.6
4,835.0	4.1	6.7
4,836.0	6.1	11.8
4,837.0	8.6	19.1
4,838.0	12.2	29.5
4,839.0	18.9	44.4
4,840.0	27.3	68.0
4,841.0	33.7	98.4
4,842.0	38.7	134.7
4,843.0	42.9	175.5
4,844.0	49.3	221.2
4,845.0	58.4	274.7
4,846.0	66.9	337.9
4,847.0	72.3	407.6
4,848.0	76.6	482.1
4,849.0	79.6	560.4
4,850.0	82.6	641.4
4,851.0	84.7	725.2
4,852.0	86.2	810.6
4,853.0	87.7	897.6
4,854.0	89.3	986.1
4,855.0	91.3	1,076.4
4,856.0	92.8	1,168.5
4,857.0	93.9	1,261.8
4,858.0	94.8	1,356.2
4,859.0	95.7	1,451.5
4,860.0	96.6	1,547.6
4,861.0	97.6	1,644.7
4,862.0	98.6	1,742.8
4,862.3	98.9	1,772.4

RINN VALLEY - PHASE 3
AREA-CAPACITY & ELEVATION

CONTOUR ELEVATION (FEET)	AREA (ACRES)	CUMULATIVE VOLUME (ACRE-FOOT)
4,836.0	1.3	0.6
4,837.0	3.3	3.2
4,838.0	4.7	7.2
4,839.0	5.5	12.4
4,840.0	8.2	18.9
4,841.0	11.2	28.6
4,842.0	13.6	41.1
4,843.0	16.9	55.7
4,844.0	18.2	72.3
4,845.0	19.0	90.7
4,846.0	19.5	109.9
4,847.0	19.9	129.7
4,848.0	20.3	149.8
4,849.0	20.7	170.3
4,850.0	21.1	191.2
4,851.0	21.5	212.6
4,852.0	22.0	234.3
4,853.0	22.4	256.5
4,854.0	22.9	279.2
4,855.0	23.3	302.3
4,856.0	23.8	325.9
4,857.0	24.3	349.9
4,857.9	24.7	372.1

Sample Accounting - Rinn Valley Reservoir

		Month	Day	Notes
0	Call	A	Name of Senior Call	
		B	Priority Date of Senior Call	
		C	Admin # of Senior Call	
		D	05CW315 Right Out of Priority?	If 1C > 56613.53964, "N", else, "Y."
		E	16CW3119 Right Out of Priority?	If 1C > 60740.00000, "N", else, "Y."
1	Diversion	A	RVD 1 (cfs)	Portion of measured value.
		B	05CW315	Portion of 1A. Up to 40 cfs.
		C	16CW3119	Portion of 1A. Up to 90 cfs combined with RVD2.
		D	Foreign Water/Free River Water/Other Water	Portion of 1A.
		E	RVD 2 (cfs)	Portion of measured value.
		F	05CW315	Portion of 1E. Up to 40 cfs.
		G	16CW3119	Portion of 1E. Up to 90 cfs combined with RVD1.
		H	Foreign Water/Free River Water/Other Water	Portion of 1E.
		I	RVD 3 (cfs)	Portion of measured value.
		J	05CW315	Portion of 1I. Up to 40 cfs.
		K	16CW3119	Portion of 1I. Up to 80 cfs.
		L	Foreign Water/Free River Water/Other Water	Portion of 1I.
		M	ID-NW (cfs)	Portion of measured value.
		N	16CW3119	Portion of 1M. Up to 10 cfs.
2	Delivery	O	Foreign Water/Free River Water/Other Water	Portion of 1M.
		P	ID-N (cfs)	Portion of measured value.
		Q	16CW3119	Portion of 1P. Up to 50 cfs.
		R	Foreign Water/Free River Water/Other Water	Portion of 1P.
		S	Godding (cfs)	Portion of measured value.
		T	16CW3119	Portion of 1S. Up to 50 cfs.
		U	Foreign Water/Free River Water/Other Water	Portion of 1S.
		A	RVD 1 (cfs)	Measured value. Limited to 1A.
		B	RVD 2 (cfs)	Measured value. Limited to 1E.
		C	RVD 3 (cfs)	Measured value. Limited to 1I.
3	Discharge	D	ID-NW (cfs)	Measured value. Limited to 1M.
		E	ID-N (cfs)	Measured value. Limited to 1P.
		F	Godding (cfs)	Measured value. Limited to 1S.
		G	Total (ac-ft)	Sum of 2A through 2F (converted from cfs to ac-ft).
		H	05CW315 Priority Water (ac-ft)	
		I	16CW3119 Priority Water (ac-ft)	
		J	Foreign Water (ac-ft)	Portion of 2G. Limited based on 2A through 2F and 1A through 1U.
		K	Free River Water (ac-ft)	
		L	Other (ac-ft)	
4	Evaporation	A	Phase 1C (cfs)	
		B	Phase 2 (cfs)	Measured value. Includes uses on-site.
		C	Phase 3 (cfs)	
		D	Total (ac-ft)	Sum of 3A through 3C (converted from cfs to ac-ft).
		E	05CW315 Priority Water (ac-ft)	
		F	16CW3119 Priority Water (ac-ft)	
		G	Foreign Water (ac-ft)	
		H	Free River Water (ac-ft)	Portion of 3D.
		I	Other (ac-ft)	
		J	Releases of OOP Storage (ac-ft)	
		A	Phase 1C	
		B	Phase 2	Observed staff gage elevation.
		C	Phase 3	
5	Storage Account	D	Phase 1C	
		E	Phase 2	Per stage-area-capacity curves and 4A through 4C.
		F	Phase 3	
		G	Total	Sum of 4D through 4F.
		H	ETr (ft)	Alfalfa reference. NCWCD Longmont South or Fort Lupton if Longmont South not available.
		I	Gross Reservoir Evaporation (ft)	Equal to $1.2 * 0.7 * 4H$.
		J	Daily Decreased Evaporation (ft/day)	Per decree, used in the event no ETr data is available.
		i	Phase 1 (ac-ft)	Equal to $4D*4I$ (In case no ETr data available: Equal to $4D*4J$).
		ii	Phase 2 (ac-ft)	Equal to $4E*4I$ (In case no ETr data available: Equal to $4E*4J$).
		iii	Phase 3 (ac-ft)	Equal to $4F*4I$ (In case no ETr data available: Equal to $4F*4J$).
		iv	Total (ac-ft)	Equal to sum of 4KI, 4KII, and 4KIII
		L	Phase 1C	
		M	Phase 2	Per stage-area-capacity curves and 4A through 4C.
		N	Phase 3	
6	Unmeasured Gains/Losses	O	Total (ac-ft)	Equal to $4L + 4M + 4N$.
		P	Calculated EOD Storage	Equal to prior day's $4O + 2G - 3D - 4KIV$.
		Q	i Unmeasured Gains	If $4O - 4P > 0$, $4O - 4P$, 0.
		Q	ii Unmeasured Losses	If $4O - 4P < 0$, $4O - 4P$, 0. Value is positive.
		R	Portion of Unmeasured Gains In-Priority	
		S	Portion of Unmeasured Gains Out-of-Priority	Based on river call and 4QI.
		T	Sum of EOD Storage	Equal to sum of 5D, 6D, 7C, 8D, 9C, and 10B. Not to exceed 4O.
		A	Total Beginning of Day Storage	Equal to prior day 5D. Subject to carryover provisions per decree and Reservoir Guidelines.
		B	Calculated Evaporation from Cell Storage	Portion of 4KIV.
7	Foreign Water Account	C	i In-Priority Unmeasured Gains	Portion of 4R.
		C	ii Unmeasured Losses	Portion of 4QII.
		D	End of Day Storage	Equal to $5A + 2H - 3E - 5B + 5CI - 5CII + 11B - 11C$.
		A	Total Beginning of Day Storage	Equal to prior day 6D. Subject to carryover provisions per decree and Reservoir Guidelines.
		B	Calculated Evaporation from Cell Storage	Portion of 4KIV.
8	Free River Account	C	i In-Priority Unmeasured Gains	Portion of 4R.
		C	ii Unmeasured Losses	Portion of 4QII.
		D	End of Day Storage	Equal to $6A + 2I - 3F - 6B + 6CI - 6CII + 12C - 12D$.
		A	Total Beginning of Day Storage	Equal to prior day 7C.
		B	Calculated Evaporation from Cell Storage	Portion of 4KIV.
9	Other Water Account	C	i In-Priority Unmeasured Gains	Portion of 4R.
		C	ii Unmeasured Losses	Portion of 4QII.
		D	End of Day Storage	Equal to $7A + 2J - 3G - 7B$.
		A	Total Beginning of Day Storage	Equal to prior day 8D.
		B	Calculated Evaporation from Cell Storage	Portion of 4KIV.
10	Storage To Be Released Per Decree	C	i In-Priority Unmeasured Gains	Portion of 4R.
		C	ii Unmeasured Losses	Portion of 4QII.
		D	End of Day Storage	Equal to $8A + 2K - 3H - 8B + 8CI - 8CII + 13A - 13B$.
		A	Total Beginning of Day Storage	Equal to prior day 9C.
		B	Calculated Evaporation from Cell Storage	Portion of 4KIV.
11	05CW315 Fill Tracking (ac-ft)	C	End of Day Storage	Equal to $9A + 2L - 3I - 9B$.
		A	Total Beginning of Day Storage	Equal to prior day's 10G.
		B	End of Day Storage	Equal to $10A - 3J + 4G$.
		A	Paper Fill	Per Reservoir Guidelines.
		B	Booked To (+)/From (-)	When in priority, limited to daily rates or pursuant to carryover provisions in the decree and Reservoir Accounting.
12	16CW3119 Fill Tracking (ac-ft)	C	Cumulative Storage Stored- First Fill	Equal to $2H + 5C + 11A + 11B$. Limited to 2,468 ac-ft.
		D	Cumulative Storage Stored- Refill	Equal to $2H + 5C + 11A + 11B$. After 11C limit has been reached, Lesser of 336 ac-ft and 4K cumulative annual.
		A	Paper Fill	Per Reservoir Guidelines.
		B	Booked To (+)/From (-)	When in priority, limited to daily rates or pursuant to carryover provisions in the decree and Reservoir Accounting.
		C	Cumulative Storage Stored- First Fill	Equal to $2I + 6C + 12B$. Limited to 3,000 ac-ft combined with 11C.
13	Free River (ac-ft)	D	Cumulative Storage Stored- Refill	Equal to $2I + 6C + 12B$. After 12C limit has been reached, Limited to 3,000 ac-ft - 11D.
		A	Booked To (+)/From (-)	When in priority, limited to daily rates.

Note: Collapsed for printing purposes. Accounting will be on a daily basis. Accounting Year is April -March. Reservoir Guidelines = Amended General Administration Guidelines for Reservoirs developed by the Colorado Division of Water Resources (DWR), February 2016.

Contact Information: Ruthanne Schaffer, Central Colorado Water Conservancy District, 3209 W 28th Street, Greeley, CO 80634, 970.330.4540.

Exhibit 2
Case No. 16CW3119

DATE FILED: January 24, 2019 2:03 PM

Sample Accounting - Subject Shares

(all values in cfs unless otherwise specified)

Month	Day*			Total		20-year Cumulative Monthly Total	Annual Total	20-year Cumulative Annual Total	Notes
	1	2	3	CFD	AF				
1	Administrative Call								Downstream of a point in the SE ¼ NW ¼ of Section 10, Township 2 N, Range 68 W, 6th P.M., Weld County, Colorado.
	a Call Impacting Idaho Creek Return Flow Obligation								
	b Admin/Priority								
	c Location								
	d Call Impacting Godding Hollow Return Flow Obligation								Downstream of a point in the NE ¼ SW ¼ of Section 11 , Township 2 N, Range 68 W, 6th P.M., Weld County, Colorado.
	e Admin/Priority								
2	f Location								
	a Augmentation Station Delivery								Equal to 2b + 2d + 2f +2h.
	b Rural Ditch Augmentation Structure								Measured deliveries attributable to Subject Shares.
	c <i>Transit Loss</i>								Transit loss to Boulder Creek. Per Water Commissioner/Division Engineer.
	d Rural Ditch Augmentation/Bypass Structure								Measured deliveries attributable to Subject Shares.
	e <i>Transit Loss</i>								Transit loss to St. Vrain Creek. Per Water Commissioner/Division Engineer.
	f Tri Town Stormwater Augmentation Structure								Measured deliveries attributable to Subject Shares.
	g <i>Transit Loss</i>								Transit loss to St. Vrain Creek. Per Water Commissioner/Division Engineer.
	h Hokestra Augmentation Structure								Measured deliveries attributable to Subject Shares.
3	i <i>Transit Loss</i>								Transit loss to St. Vrain Creek. Per Water Commissioner/Division Engineer.
	a Storage Delivery								Equal to sum of 3b through 3f.
	b Shores Pond B Inlet Structure								Portion of measured deliveries attributable to Subject Shares.
	c Hoekstra Pit								Portion of measured deliveries attributable to Subject Shares.
	d Shores Pond C Inlet Structure								Portion of measured deliveries attributable to Subject Shares.
	e RVWSR								Portion of measured deliveries attributable to Subject Shares.
4	f Heaton Pit								Portion of measured deliveries attributable to Subject Shares.
	Total Delivery of Subject Shares								Equal to 2a + 3a. Subject to volumetric limits as described in the decree entered in Case No. 16CW3119..
5	Return Flow								
	a Prior Year Augmentation Delivery								Equal to 4 for prior year.
	b Idaho Creek Return Flow Factor								
	Surface								Equal to monthly factor.
	Deep Perc								Equal to monthly factor.
	c Godding Hollow Return Flow Factor								Equal to monthly factor.
	d Calculated Return Flow								Equal to sum of 5e and 5f.
	e For Historic Idaho Creek Accruals								Equal to sum of 5e Surface and 5e Deep Perc.
	Surface								For April through October: Equal to 4*5b for surface return flow on a daily basis.
	Deep Perc								Equal to 5a * 5b for deep percolation divided by the number of days in the month.
6	f For Historic Godding Hollow Accruals								Equal to 5a*5c divided by the number of days in the month.
	g Appropriated Return Flows								Sum of 5h and 5i.
	h For Historic Idaho Creek Accruals								Equal to 5e, when in priority.
	i For Historic Godding Hollow Accruals								Equal to 5f, when in priority.
	Replacements								Per decree, may include but not limited to the Subject Shares.
7	a Source 1								Name, location.
	b Amount								
	c <i>Transit Loss</i>								Per Water Commissioner/Division Engineer, as applicable.
	d Source 2								Name, location.
	e Amount								
	f <i>Transit Loss</i>								Per Water Commissioner/Division Engineer, as applicable.
	g Net Replacement								Equal to 6b - 6c + 6e - 6f.
	h For Historic Idaho Creek Accruals								Portion of 6g available above the call and used to replace return flow obligations for Idaho Creek RF point. Must be equivalent to 5e - 5h.
	i For Historic Godding Hollow Accruals								Portion of 6g available above the call and used to replace return flow obligations for Godding Hollow RF point. Must be equivalent to 5f - 5i.
Consumptive Use Credits	a Total								Equal to 4a - 5d + 5g + 6g*.
	b Net								* 6g included in calculation for replacement sources other than direct use of the Subject Shares.
									Equal to 7a -2c - 2e - 2g -2i. Consumptive Use Credits available to Central including for delivery to the storage structures (3a through 3f) and for use at locations downstream of delivery to augmentation stations (2b, 2d, 2f, and 2h), subject to additional assessed transit losses per the decree

* Accounting will be daily. Condensed herein to allow for greater resolution.

Contact Information: Ruthanne Schaffer, Central Colorado Water Conservancy District, 3209 W 28th Street, Greeley, CO 80634, 970.330.4540.

CENTRAL COLORADO WATER CONSERVANCY DISTRICT
GROUND WATER MANAGEMENT SUBDISTRICT AND WELL AUGMENTATION SUBDISTRICT

DATE FILED: January 24, 2019 2:03 PM

CASE NO.	NAME	SOURCE	ADJ. DATE	Comment
W7905/84CW405	Brighton and Fort Lupton Augmentation Well Fields	South Platte River	2/25/1985	e
81CW382	Milliron & Kiowa Recharge & Storage Project	South Platte River	4/29/1987	e
82CW413/92CW48/93CW86/00CW218	Box Elder Recharge and Storage Project	South Platte River	10/6/1993	e
83CW184/95CW111/02CW041	Chatfield Reservoir	South Platte River	03/29/1989	e
85CW370/95CW77/02CW146	Farmers Independent Recharge Project	South Platte River	3/29/1989	e
86CW397	McDowell Ranch	South Platte River	5/10/2000	e
87CW304/97CW161	Western Mutual Ditch Recharge Project	South Platte River	6/21/1991	e
88CW127/96CW113/03CW335	Siebring Reservoir and W.R. Jones Ditch (62 shares)	Cache La Poudre	5/25/1990	e
92CW021/06CW185	Koenig Reservoir	South Platte River	2/3/2000	e
92CW165/02CW262/09CW102	Jo Dee Reservoir, Jacoby/Schmidt Ditch, Box Elder Ditch (1 share)	Cache La Poudre	11/29/1996	e
93CW085	Lupton Bottoms Ditch (5 shares)	South Platte River	8/9/1995	e
94CW096/01CW018/07CW286	83rd Avenue Reservoir	Cache La Poudre	2/27/1995	e
94CW097/02CW074	La Poudre Reservoirs 3 & 4	Cache La Poudre	4/12/1996	e
94CW199	Lupton Bottoms Recharge & Storage Project	South Platte River	12/16/1996	e
97CW077	Greeley-Loveland (26+ shares), Seven Lakes, Lake Loveland	Big Thompson River	7/1/2003	e
97CW078	Greeley Irrigation Co. (20 shares)	Cache La Poudre	12/11/2001	e
00CW072	W.R. Jones Ditch (15 shares)	Cache La Poudre	3/14/2005	a, e
00CW083	Shores Lake	Boulder Creek	7/22/2009	e
00CW166	B. H. Eaton (9 shares) & Boxelder(1.5 shares)	Cache La Poudre	11/21/2006	e
01CW048	Platteville Recharge & Storage Project	South Platte River	11/19/2008	e
01CW255	Booth Farm Rights, Boulder and Weld Reservoir	St. Vrain Creek	5/6/2010	d, e
01CW263	Weldon Valley Ditch (4 shares)	South Platte River	3/17/2007	e
01CW264	Fulton Irrigating Ditch Company (150 shares)	South Platte River	6/23/2008	e
02CW172	Union Reservoir (20.5 shares)	St. Vrain Creek	9/20/2007	e
02CW200	W.R. Jones Ditch (62 shares)	Cache La Poudre	3/14/2005	a, e
02CW265	Lupton Meadows Ditch (60 shares)	South Platte River	2/8/2008	e
02CW269	Bernhardt Reservoir	Big Thompson River	10/20/2005	e
02CW270	Nissen Reservoir	South Platte River	10/20/2005	e
02CW377	Weldon Valley Recharge (pro-rata)	South Platte River	11/5/2009	e
02CW335	Augmentation Wells	South Platte River	6/3/2005	b
96CW658/03CW348	Greeley Irrigation Company (65 3/4 shares)	Cache La Poudre	6/26/2009	e
04CW276	Farmers Independent Ditch Co. (27.75 shares and 10.0 shares)	South Platte River	11/20/2009	e
05CW053	Big Thompson & Platte River Ditch Co. (7 shares)	Big Thompson River	6/22/2009	e
05CW054	Greeley Irrigation Co. (12 shares)	Cache La Poudre	5/13/2009	e
05CW069	Platteville Milling & Irrigation Co. (13/24 shares)	South Platte River	7/10/2009	e
05CW079	Brighton Ditch Co.(1/10 Share)	South Platte River	9/23/2009	e
05CW223	Godfrey Ditch Co. (5 shares)	South Platte River	1/24/2011	e
05CW331	Central Recharge and Exchange Plan	South Platte River	10/7/2011	e
07CW006	Plumb Ditch (47 shares)	South Platte River	7/26/2010	e
07CW087	Augmentation Wells	South Platte River	1/5/2013	b
08CW071	Platte Valley Irrigation Co. (3.0 shares)	South Platte River	5/27/2014	e
10CW139	Alternate Point and Diversion and Storage	Cache La Poudre	10/4/2013	e
10CW173	Greeley Irrigation Co. (2.0 shares)	Cache La Poudre	5/22/2012	e
11CW020	Greeley Irrigation Co. (10.8 shares)	Cache La Poudre	10/18/2013	e
12CW163	Greeley Irrigation Co. (2.9 shares)	Cache La Poudre	4/14/2014	e
12CW304	Geisert Reservoir	Cache La Poudre	2/1/2016	e
13CW029	Rural Ditch (2.5 shares), Godding Ditch (20 shares)	Boulder Creek	9/22/2015	d, e
13CW3025	Fulton Ditch Co. (17.85 shares)	South Platte River	11/10/2016	e
14CW3006	Fulton Ditch Co. (30 shares)	South Platte River	6/10/2015	e
14CW3007	Lupton Bottom Ditch Co. (1.5 shares), Lupton Meadows Ditch Co. (90 shares)	South Platte River	11/27/2015	e
14CW3123	Fulton Ditch Co. (50 shares), Recharge, and Exchange	South Platte River	3/22/2018	e
15CW3148	Chatfield Reservoir Refill Storage Right	South Platte River	Pending	e
16CW3008	Greeley Irrigation Co. (8 shares)	Cache La Poudre	10/12/2018	e
16CW3119	Rural Ditch Co. (7.04 shares) and Rinn Valley Water Storage Reservoir	St. Vrain Creek	Pending	c, e
16CW3202	Walker Recharge Project	South Platte River	Pending	e
17CW3202	Hokestra Reservoir and Rural Ditch Co. (2.75 shares)	Boulder Creek	Pending	e
18CW3106	Greeley Irrigation Co. (6.5 shares)	Cache La Poudre	Pending	e
<hr/>				
LESSOR	NAME	LOCATION	LEASE DATE	Comment
City of Aurora	Fully Consumable Effluent	South Platte River	05/2006	e
City of Longmont	Fully Consumable Effluent	St. Vrain Creek	06/2011	e
City of Longmont	Wind Gap / Fully Consumable Effluent	St. Vrain Creek	06/2011	e
Town of Evans	Direct Flow Water Rights - Godfrey Bottom Ditch	South Platte River	8/20008	e
City of Thornton	Water Supply and Storage Company - Transmountain Return Flows	Cache La Poudre	02/2013	e
WSSC-LPAC	Water Supply and Storage Company - Transmountain Return Flows	Cache La Poudre	2010-2014	e
Platte Valley Irrigation Company	Recharge Credits	South Platte River	02/2015	e
PVIC Augmentation Group	Fully Consumable Direct Flow Water Rights - Platte Valley Canal	South Platte River	07/1905	e
City of Brighton	Fully Consumable Effluent	South Platte River	06/2014	e
FRICO	Recharge Credits	South Platte River	08/2014	e

Comment:

- a. No augmentation or replacement credit available.
- b. May be used only for augmentation of CCWCD constituent wells (not used for replacement of return flows).
- c. Available to Idaho Creek above the point of return flow accrual.
- d. Available to Godding Hollow above the point of return flow accrual.
- e. Available below the points of return flow accrual.